ORTECH®

Product Specification Sheet

FLUSH MOUNTS

FM1-15-5CCT



HIGHLIGHTS

15" Super Slim Frame LED Flush Mounts With Edge-lit Technology, And Selectable CCT

- Edge-lit technology, no glare or dark spots, instant-on
- This 0.8" thick luminaire is easy to install on standard J-boxes with mounting bracket
- PC lamp body with white translucent acrylic lens
- Triac Dimmable, Certified airtight, IC rated
- Suitable for WET location
- Rated for a long life - over 50,000 hours

30W | 120V AC | 2400 LMN | 80Ra+ CRI

CERTIFICATIONS

DIMMABLE | c ETL us Intertek | Indoor Use | Air Tight | Wet Location

COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)


SPECIFICATIONS

MODEL	FM1-15-5CCT
Wattage	30W
Voltage	120V AC, 60Hz
Lumens	2400 lmn
Beam Angle	110°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
Grade Of Protection	IP54
CRI	80Ra+
Diffuser/Lens Material	PC
Rating	IC rated/Wet location/ Indoor use
Operating Temperature	-20°C ~ +40°C
Application	Corridors / Lobbies / Kitchens / Bathrooms / Bedrooms

FLAT-OUT FABULOUS CEILING PERFECTION

5 YEAR WARRANTY

DIMENSIONS

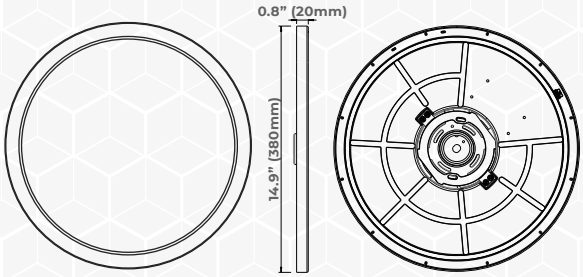

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.


www.ortechindustries.ca | TF 1.888.543.6473 | 13376 Comber Way, Surrey, BC V3W 5V9 | 205 Summerlea Road, Brampton, Ontario | info@ortechindustries.com | 604.543.6473

ORTECH®


Product Specification Sheet

FLUSH MOUNTS

FM1-15-5CCT

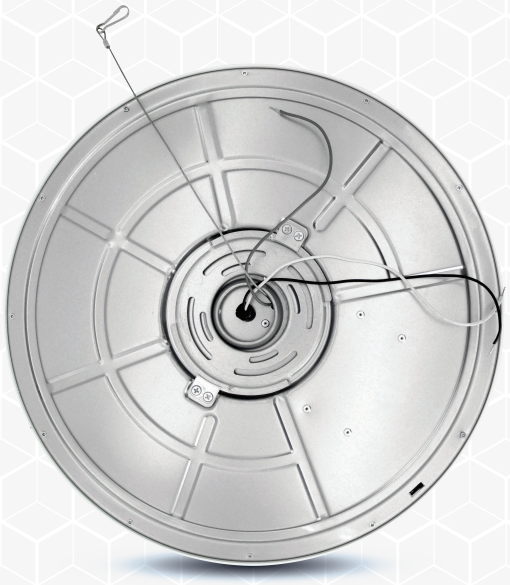


INSTALLATION

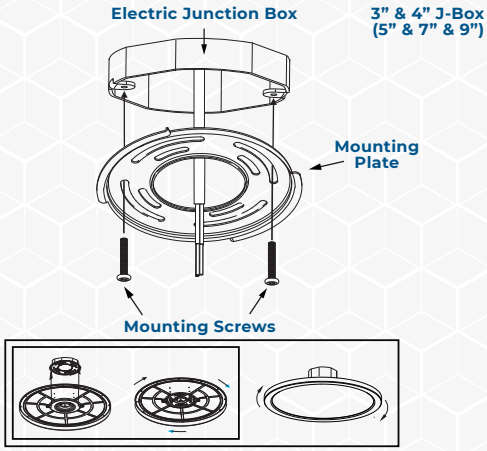

INCLUDED IN BOX

- 15" LED Flush Mount Light
- Two Mounting Screws
- Three Wire Nuts
- 1 Mounting Plate



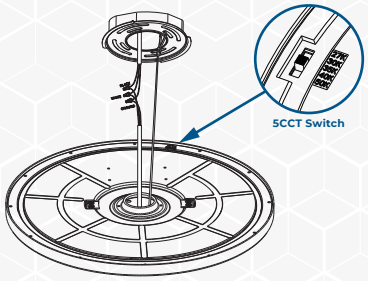

INTERCHANGEABLE RINGS (SOLD SEPARATELY)



FM1-15-RINGBK



FM1-15-RINGSN

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.