ORTECH®

Instruction Manual

FLUSH MOUNTS

FM1-15-5CCT



Wet Location

Air Tight

Indoor Use

Intertek

DIMMABLE

WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

- LED Flush Mount lights are suitable for using in damp locations
- Please keep the LED Closet lights away from any corrosive substance, and please use dry cloth when you clean it
- Before installation or maintenance, please disconnect the power to prevent electric shock

CAUTION

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

- Electrical products can cause death or injury, or damage to property.
- If in any doubt about the installation or use of this product, consult a competent electrician.

APPLICATION NOTICE

1. RISK OF SHOCK — House electric current can cause painful shock or serious injury unless handled properly.
For your safety, always remember to:
A) Turn OFF the power supply at the fuse or circuit breaker box before you install the fixture
B) Double-check all connections to be sure that they are tight and correct
2. This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical
codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code
3. RISK OF CUTS — some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts
4. Account for small parts and destroy packing material, as these may be hazardous to children
5. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person
6. Terminal block and the suspending accessories are not included. Installation must be performed by a qualified person

TOOLS REQUIRED




Phillips Screwdriver | Wire Cutters | Pliers | Wrench

INSTALLATION GUIDE


OPTION 1: FLUSH MOUNT

STEP 1



1. Pull the supply wires and house ground wire from the Outlet Box. Position the mounting plate over the Junction Box. Mark the location of the two holes located on the Mounting Plate. Be sure to mark only the narrow parts of the hole. Removeing Plate from the ceiling. Drill the two holes using the appropriate type and size drill bit. Insert anchors into the holes. **(See Step 1)**

STEP 2



2. Select CCT on the switch. Make wire connections: Connect the house ground wire to the fixtrue ground wire; connect the white supply wire to the white fixture wire; connect the black supply wire to the black fixture wire by using the wire connectors. Carefully tuck all wires back into the junction box. **(See Step 2)**

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

www.ortechindustries.ca | TF 1.888.543.6473 | 13376 Comber Way, Surrey, BC V3W 5V9 | 205 Summerlea Road, Brampton, Ontario | info@ortechindustries.com | 604.543.6473

ORTECH®

Product Specification Sheet

FLUSH MOUNTS


FM1-15-5CCT

INSTALLATION GUIDE

OPTION 1: FLUSH MOUNT


STEP 3

3. Snap and fix the clip in the bracket.
(See Step 3)

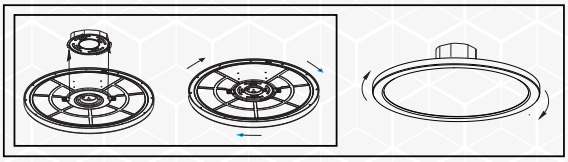

STEP 4


4. Turn on the power and Light up the lamp.

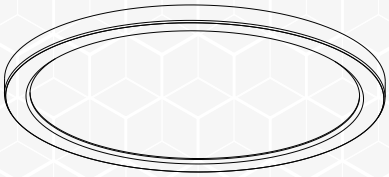

DECORATIVE TRIM/FRAME INSTALLATION


STEP 1

1. Tear the paper from the 3M tape.




STEP 2

2. Put the frame into the lamp body and bond the backplane of the lamp body.




STEP 3

3. First press the buckle lug into the groove and make it tight. And make the other buckle bends tight.



STEP 4

4. Snap and fix the mounting plate in the bracket. Rotate and lock the lamp.

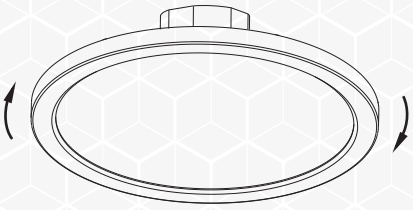



ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

www.ortechindustries.ca | TF 1.888.543.6473 | 13376 Comber Way, Surrey, BC V3W 5V9 | 205 Summerlea Road, Brampton, Ontario | info@ortechindustries.com | 604.543.6473