ORTECH

Product Specification Sheet

LED VAPOUR TIGHTS

VT-W60-3CCT+W | VT-W60MS-3CCT+W




HIGHLIGHTS

Wide LED vapour tight suitable for wet locations

- 4.92" wide body - fully covers most traditional junction boxes
- Slotted iron Board, excellent heat dissipation
- Suitable for all commercial needs
- Modular installation, save labor cost
- IP Rating 66 - rated for wet location
- Corrosion Resistant
- **WMS** model comes with motion sensor with dip switch installed

DIMENSIONS

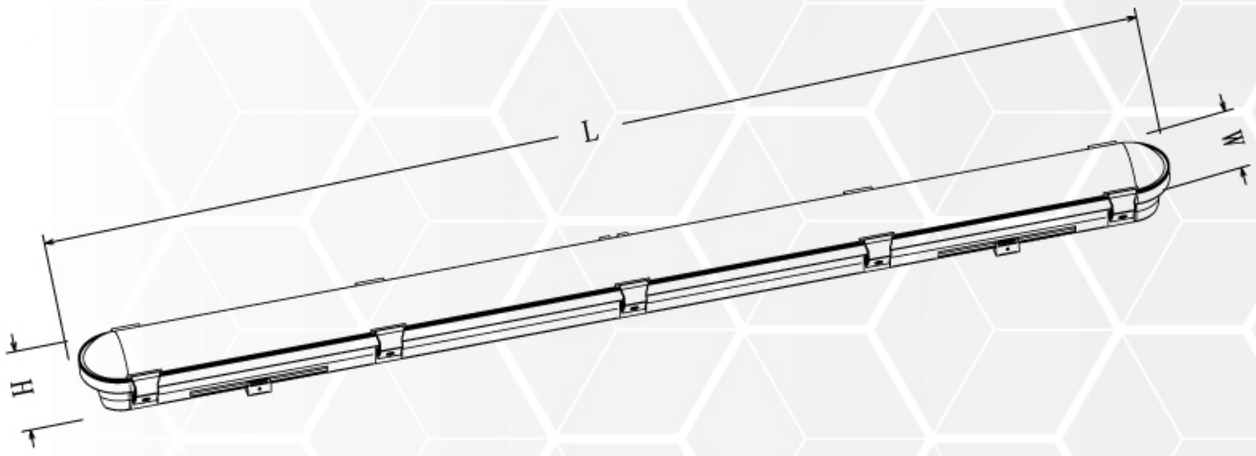

NEMA 4X · IP66 · DLC LISTED · Wet Location · DIMMABLE · c ETL us Intertek

Model	L×W×H (mm/inch)
VT-W60-3CCT+W **VT-W60MS-3CCT+W**	1200*125*88 (mm) / 47.24”*4.92”*3.46”

SPECIFICATIONS

Model	VT-W60-3CCT+W | VT-W60MS-3CCT+W
Wattage	40W | 50W |60W
Voltage	AC120-347V
Power Factor	>0.9
Beam Angle	120°
Lifetime	50000 hours
Dimmable	Yes(only 0-10v dimming available)
Warranty	5 years
Grade of Protection	IP66
Luminous Efficiency	≥130LM/W
Colour Temp.	3500K / 4000K / 5000K
Application	Supermarket / Warehouse / Underground parking place / Garage / Workshops
THD (Total Harmonic Distortion)	<20%
Operating Temp.	-20°C ~ +40°C
Case Quantities	8

ACCESSORIES



VT-SUS-KIT (aircraft cable length: 4.92ft.)


www.ortechindustries.ca · TF 1.888.543.6473 · 13376 Comber Way, Surrey, BC V3W 5V9 · 205 Summerlea Road, Brampton, Ontario · info@ortechindustries.com · 604.543.6473


ORTECH
Product Specification Sheet

LED VAPOUR TIGHTS

VT-W60-3CCT+W | VT-W60MS-3CCT+W

TESTING REPORT

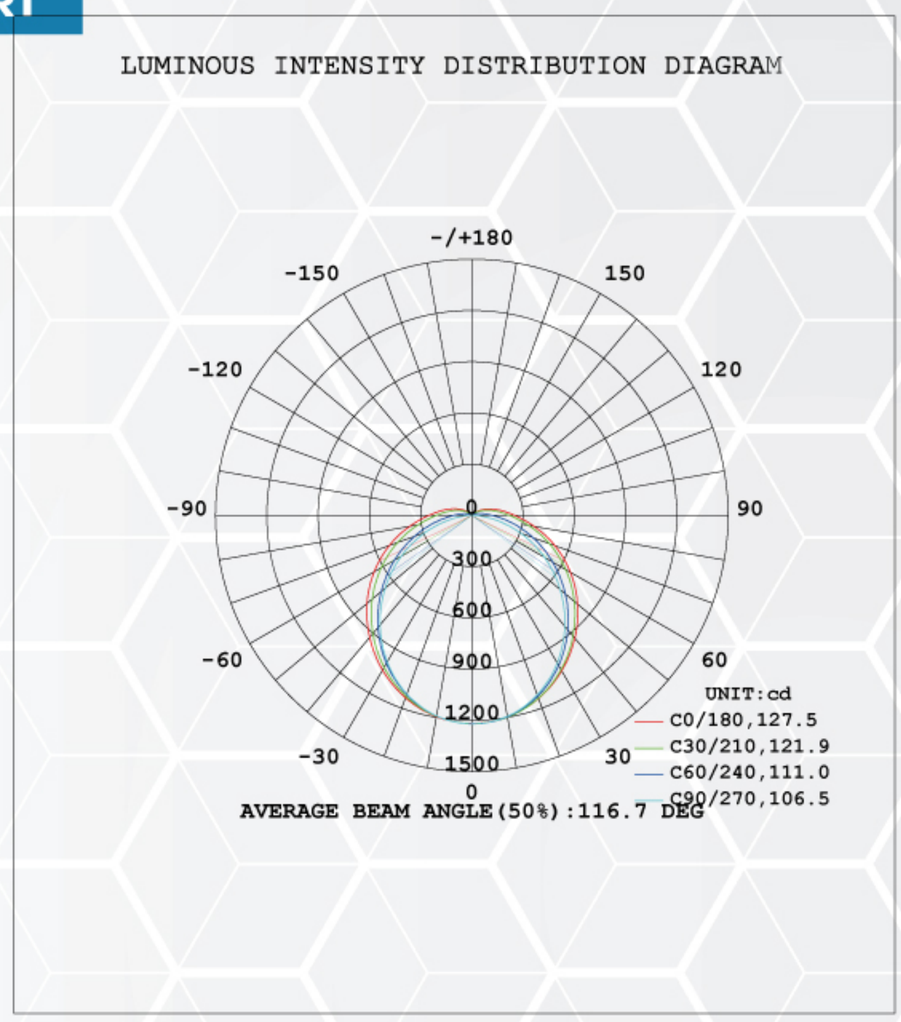

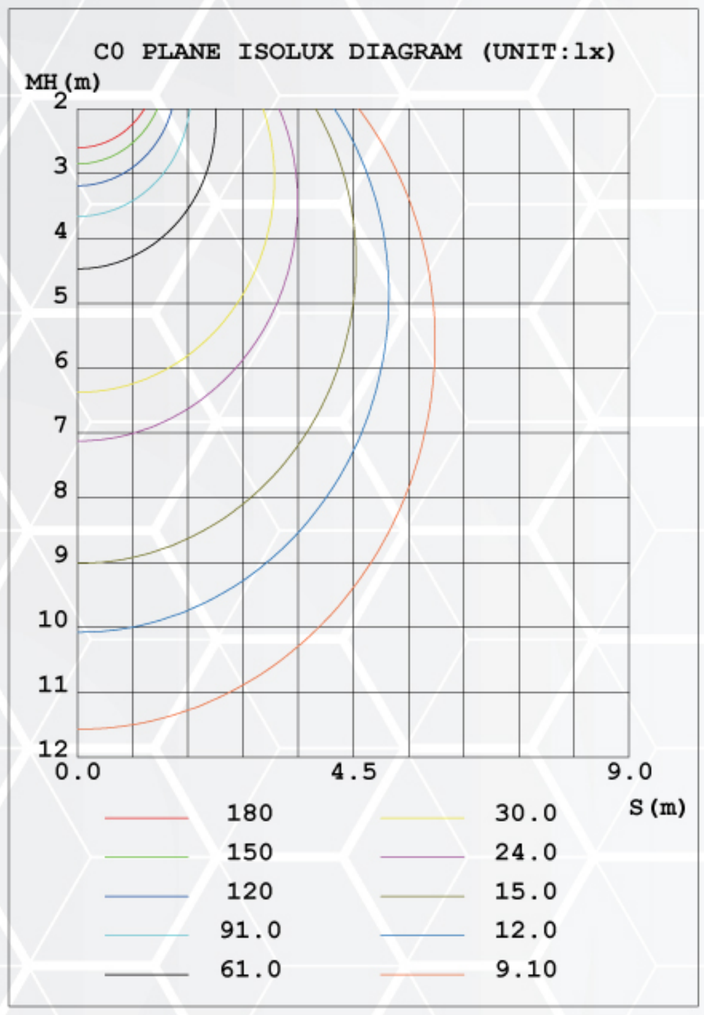

APPLICATIONS



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

www.ortechindustries.ca
TF 1.888.543.6473
13376 Comber Way, Surrey, BC V3W 5V9
205 Summerlea Road, Brampton, Ontario
info@ortechindustries.com
604.543.6473