ETLIN-DANIELS

INSTALLATION MANUAL FOR SURFACE MOUNT RTFFR4 AND RTFFR56



SAVE THESE INSTRUCTIONS - READ ALL INSTRUCTIONS CAREFULLY

LED DISK LIGHT provides surface mount light for 4" junction boxes & fire rated boxes.
It is also suitable for use in dry, damp and wet locations.

⚠ WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION.

- To prevent personal injury or product damage only licensed electricians/personnel should install fixture.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the National Electric Code (NEC) and all applicable Federal, State/Provincial and Local Electric Codes and Safety Standards.
- **Risk of Fire** Supply conductors (power wires) connecting the fixture must be rated minimum 90°C. If uncertain, consult your licensed electricians.

TECHNICAL SPECIFICATION

VOLTAGE: 120V, 60Hz AC operation
WATTAGE: 10W-20 pcs LED chips, 15W-28 pcs LED chips
LUMENS: 10W, 600LMS, CR80, 15W, 1000LMS, CRI80
DIFFUSER: Translucent white PC opal diffuser
HARDWARE: All mounting screws and wire connectors
TOOL USE: Phillips screw driver and glue gun
WARRANTY: 5 Years, limited warranty

RECOMMENDED DIMMER COMPATIBILITY LIST

BRAND	SERIES	MODEL	LOAD	DIMM
LEVITON	SURESLIDE	6633	600W	10%-100%
	SURESLIDE DECORA	6674	600W	20%-100%
	TRIMATRON	6602	600W	20%-100%
	ILLVMATECH	IPL06	600W	1%-100%
LEGRAND	ADORNE	ADTP703TU	700W	20%-100%
	HARMONY	H703PTW	700W	10%-100%
COOPER	ASPIRE	9540	1000W	10%-100%
	DEVINE	DAL06P	300W	10%-100%

BRAND	SERIES	MODEL	LOAD	DIMM
LUTRON	ARIADNI	AYCL-153P	150W	10%-100%
	DIVA	DV-600PR	600W	1%-100%
	DIVA	DVCL-153P	150W	10%-100%
	MAESTRO	MACL-153MH	600W	10%-100%
	MAESTRO WIRELESS	MRF2-6CL	150W	10%-100%
	ROTARY	D-600P	600W	10%-100%
	ELECTRONIC (ELV)	NTELV-300P	600W	10%-100%
	SKYLARK	S-600P	600W	10%-100%
	SKYLARK CONTOUR	CT-600P	600W	1%-100%
	SKYLARK CONTOUR	CTCL-153P	150W	10%-100%
	TOGGLER	TG-600P	600W	10%-100%
	TOGGLER	TCCL-153P	150W	10%-100%

INSTALLATION

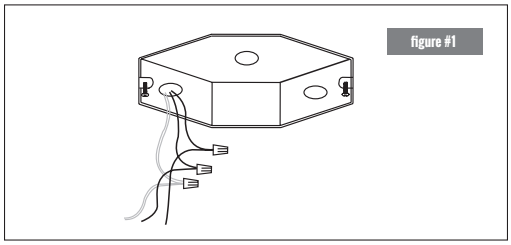
figure #1

Step 1) Prior to installation. please install two screws (furnished)into the junction box. Do not drive screws completely to the endof the junction box.

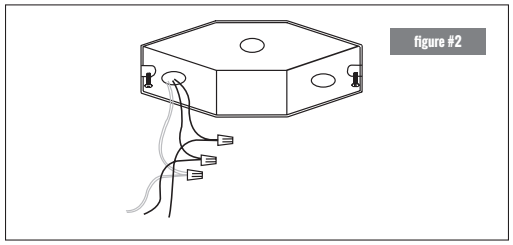
figure #2

Step 2) Connect supply wires to wires in fixture wiring box withproper size wire nuts or push wires into "push-in" connector. Connect white to white, black to black, and green or bare copper to bare copper wire.

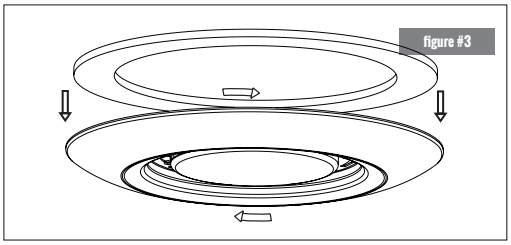
figure #3

Step 3) The ground wire at the service junction box may need to be secured to a ground screw.

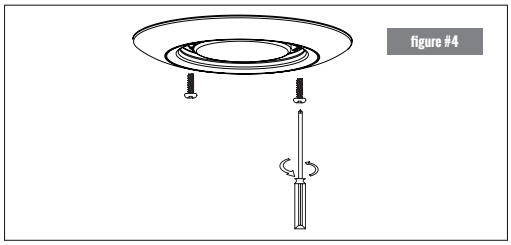
figure #4

Step 4) With a Phillips screwdriver, attach the disk light tightly to the j-box.

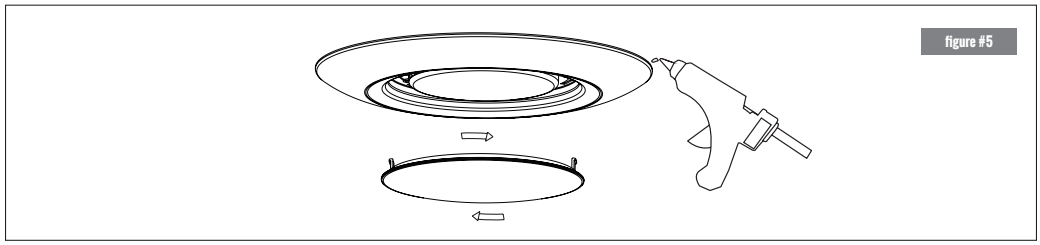
figure #5

Step 5) Complete the installation by twisting the diffuser on the disk light aluminum enclosure and lock the diffuser in place.
Step 6) The edge of the fixture and the ceiling use waterproof silicone to seal

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104 ·
Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)
www.etlin-daniels.com · For sales/service questions - sales@etlin.com