
ETLIN-DANIELS

PRODUCT CODE: DLCLR4-5812WC0-WH-FB

4 INCH LED COMMERCIAL RECESSED DOWNLIGHT/MULTI-WATTAGE/3CCT



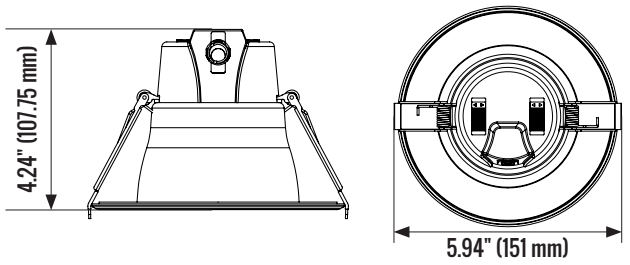

PRODUCT DESCRIPTION

The new Etlin-Daniels DLCLR4-5812WC0-WH-FB LED Commercial Recessed Downlight offers a simple to install, high performance solution for a wide variety of applications. Each LED fixture is available in 120-347V, and has a 3CCT switch offering 3000K, 3500K & 4000K options, along with a Multi-Wattage Switch offering 3 lumen / wattage levels.
The deep baffle design provides glare free illumination with a 90° beam pattern. Wet location rated, with an IC Rated, Airtight Housing, the new DLCLR series is the perfect option for either new design builds, or to retrofit and upgrade existing recessed housings.
Available in a white housing with snap-on black and silver trims. White goof rings and pre-mounting plates are available for T-Grid ceilings as well as stud / joist installations. The 3 sizes provide the perfect solution for retail, commercial and residential, hospitality, educational and healthcare applications. For further energy savings, take advantage of the 0-10V Continuous Dimming.

FEATURES

- LED Indoor Light Source
- Wet Location Rated
- IC Rated with Airtight Housing
- 90 CRI
- 120-347V
- 90° Beam Pattern
- 3CCT and 3 Multi-Wattage Switching
- 0-10V Continuous Dimming
- Snap-On Black and Silver Trims
- Goof Rings (white) Available
- 24" BX Cable Attached with Connector
- Safety Clip Attached
- 5 Year Warranty
- Energy Star Certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	MULTI-WATTAGE / LUMENS / SELETABLE COLOR TEMPERATURE	SYSTEM EFFICACY	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
HONGLI 2835	52CHIPS	5.5W - 3000K - 499LM / 3500K - 495LM / 4000K - 494LM 8W - 3000K - 735LM / 3500K - 760LM / 4000K - 750LM 12W - 3000K - 1059LM / 3500K - 1103LM / 4000K - 1054LM	91 LM/W 87.5 LM/W 83.3 LM/W	90°	>90CRI	>0.80%	>80%	>0.90	25%

PRODUCT SPECIFICATIONS

VOLTAGE	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120 - 347V	50/60HZ	ALUMINUM/ POLYCARBONATE LENS	>50,000 HOURS	-20°C~+40°C -4°F~+104°F	-20°C~+40°C -4°F~+104°F	Ø5.94 X 4.24 INCHES (151 X 108 MM)	4.84 X 4.92 X 6.14 INCHES (123 X 125 X 156MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
RECESSED CEILING MOUNT	WHITE WITH FROSTED LENS	0 - 10V CONTINUOUS DIMMING

ETLIN-DANIELS

PRODUCT CODE: DLCLR4-5812WC0-WH-FB | **4 INCH LED COMMERCIAL RECESSED DOWNLIGHT/MULTI-WATTAGE/3CCT**

ENERGY STAR LISTING

ED Model Number	Technical Requirements Version	ENERGY STAR Unique ID	Listed Model Number	Category	Primary Use Designation
DLCLR4-5812WC0-WH-FB	ES2.0	2382729	DLCLR4-5812WC0-WH-FB	Indoor	Downlight Recessed

CERTIFICATIONS

IP65 · 5 YEAR LIMITED WARRANTY · RoHS

CAN ICES-005 (B) / NMB-005 (B)

DRIVER / LED CHIP

DIMMABLE

ACCESSORIES



SNAP-ON TRIM 4", BLACK
PART# DLCLTM4-BL
SNAP-ON TRIM 4" SILVER
PART# DLCLTM4-SI


GOOF RING , WHITE
OVERALL DIA. 8 1/2"
PART# DLCLGR4-WH

PRE-MOUNTING PLATE - T-GRID CEILING FOR DLCLR4, DLCLR6 AND DLCLR8



PART NO#: DLCLRMP-TG

PRE-MOUNTING PLATE - STUD / JOIST CEILING FOR DLCLR4, DLCLR6 AND DLCLR8



PART NO#: DLCLRMP-SJ

ORDERING INFORMATION - DLCLR SERIES

SERIES	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS
E.G. DLCL	R	4	5812	W	C	0	WH	FB
DLCL = COMMERCIAL	R = ROUND	4 = 4"	5 = 5.5W	W = 120 - 347V	C - CHANGEABLE	0 - 10V CONTINUOUS	WH - WHITE	FB- FROSTED LENS
DOWNLIGHT			8 = 8W		3000K, 3500K, 4000K	DIMMING		AND BAFFLE
			12 = 12W					

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLCLRMP-TG OR DLCLRMP-SJ WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com