
ETLIN-DANIELS

PRODUCT CODE: DLCLR6-M18W5CO-WHH-FB

6 INCH LED COMMERCIAL RECESSED DOWNLIGHT/MULTI-WATTAGE/5CCT



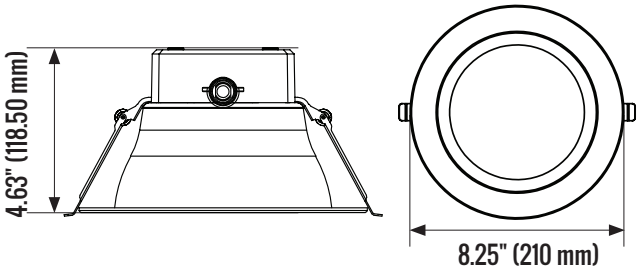

PRODUCT DESCRIPTION

The new Etlin-Daniels DLCLR6-M18W5CO-WHH-FB Commercial Recessed Downlight offers an all-in-one, simple to install and high performance solution for both new construction and retrofit applications.

Each LED fixture is available in 120-347V, and has a 3 level Multi-Wattage selector along with a 5CCT selector. The deep baffle design provides glare-free illumination with a 90° beam pattern - Wet Location Indoor rated with an IC rated, Airtight housing.

Available in white with snap-on trims in black and silver. White goof rings and pre-mounting plates are available for t-grid ceilings as well as stud / joist installations.

The new DLCLR-M series provides a perfect solution for retail, commercial and residential, hospitality, educational and healthcare applications. For further energy savings, take advantage of the available 0-10V Continuous Dimming.

FEATURES

- LED Indoor Light Source
- Wet Location Indoor Rated
- IC Rated with Airtight Housing
- 90 CRI
- 120-347V
- 90° Beam Pattern
- 3 Multi-Wattage Switching - 7W / 10W / 18W
- 5CCT - 2700K / 3000K / 3500K / 4000K / 5000K
- 0-10V Continuous Dimming
- Snap-On Black and Silver Trims
- Goof Rings and Pre-Mounting Plates Available
- 24" BX Cable Attached with Adaptor / Safety Clip Attached
- 5 Year Warranty
- Energy Star Version 1.0 Certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	MULTI-WATTAGE / SELETABLE COLOR TEMPERATURE / LUMENS	SYSTEM EFFICACY	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
HONGLI 2835	52 CHIPS	7W - 2700K - 578LM / 3000K - 588LM / 3500K - 606LM / 4000K - 578LM / 5000K - 614LM 10W - 2700K - 814LM / 3000K - 839LM / 3500K - 880LM / 4000K - 886LM / 5000K - 885LM 18W - 2700K - 1336LM / 3000K - 1389LM / 3500K -1467LM / 4000K - 1442LM / 5000K - 1421LM	82.50 - 87.71 LM/W 81.40 - 88.60 LM/W 74.22 - 81.50 LM/W	90°	>90CRI	>0.85%	>85%	>0.90	25%

PRODUCT SPECIFICATIONS

VOLTAGE	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120 - 347V	50/60HZ	ALUMINUM/ POLYCARBONATE LENS	>50,000 HOURS	- 20°C~+40°C - 4°F~+104°F	- 20°C~+40°C - 4°F~+104°F	Ø8.25 X 4.63 INCHES (210 X 118.5 MM)	8.6 X 8.6 X 5.5 INCHES (220 X 220 X 140MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
RECESSED CEILING MOUNT	WHITE WITH FROSTED LENS	0 - 10V CONTINUOUS DIMMING

ETLIN-DANIELS

PRODUCT CODE: DLCLR6-M18W5C0-WHH-FB | **6 INCH LED COMMERCIAL RECESSED DOWNLIGHT/MULTI-WATTAGE/5CCT**

ENERGY STAR LISTING

ED Model Number	Technical Requirements Version	ENERGY STAR Unique ID	Listed Model Number	Category	Primary Use Designation
DLCLR6-M18W5C0-WH-FB	ES2.0	2631735	DLCLR6-M18W5C0-WH-FB	Indoor	Downlight Recessed

CERTIFICATIONS

Intertek · ENERGY STAR · IC RATED · 5 YEAR LIMITED WARRANTY · RoHS 2002/95/EC

CAN ICES-005 (B) / NMB-005 (B)

DRIVER / LED CHIP

DIMMABLE

ACCESSORIES



SNAP-ON TRIM 6", BLACK
PART# DLCLTM6-BL


GOOF RING , WHITE
OVERALL DIA. 10 1/2"
PART# DLCLGR6-WH

PRE-MOUNTING PLATE - T-GRID CEILING FOR DLCLR4, DLCLR6 AND DLCLR8



PART NO#: DLCLRMP-TG

PRE-MOUNTING PLATE - STUD / JOIST CEILING FOR DLCLR4, DLCLR6 AND DLCLR8



PART NO#: DLCLRMP-SJ

ORDERING INFORMATION - DLCLR SERIES

SERIES	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS
E.G. DLCL	R	6	M18	W	5C	0	WHH	FB
DLCL = COMMERCIAL	R = ROUND	6 = 6"	7 = 7W	W = 120 - 347V	5C - CHANGEABLE	0 - 10V CONTINUOUS	WHH -	FB- FROSTED LENS
DOWNLIGHT			10 = 10W		2700K, 3000K, 3500K,	DIMMING	WHITE	AND BAFFLE
			18 = 18W		4000K, 5000K			

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLCLRMP-TG OR DLCLRMP-SJ WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com