

EX400 / EC402 SERIES
EMERGENCY LIGHTING - WET LOCATION






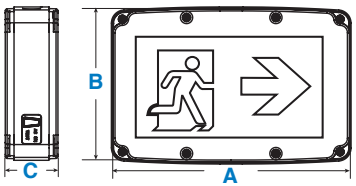

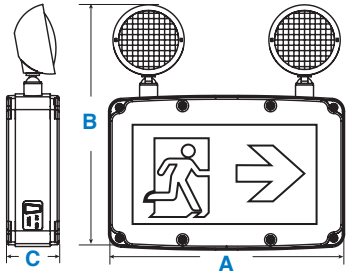

ACCESSORIES AVAILABLE:
EXEC-WG-L - WIRE GUARD



SERIES	DIMENSIONS		
	A	B	C
EX400	13.94" 354 mm	9.21" 234 mm	3.26" 83 mm
EC402	13.94" 354 mm	14.49" 368 mm	3.26" 83 mm

DESIGN:
- Fire resistant ABS thermoplastic body.
- Single or double face.
- 3 pictograms included for directional orientation.
- Wet Location Certified.
- High illuminance LED display.

MOUNTING:
- EX400 - Universal ceiling, wall,and side mount.
- EC402 - Wall and side mount.

CIRCUITS:
- 120-347V, 50/60Hz.
- >120 Minute Battery Back-up.
- 24 Hour Recharge Time.
- EC402 - 2 X 0.5W Combo Heads.
- Push Button Test Switch / Pilot LED for AC on and Charge Indicator.
- Overcharge / Over-discharge protection circuits.
- Surge Protection – 1800V.

CERTIFICATIONS:
- NEMA4X
- cULus
- Complies to CSA 22.2 #141-15
- Meets ICES-005 Requirements

17,000 HOURS LIFE SPAN

SERIES	PART NUMBER	OUTPUT VOLTAGE	POWER	POWER FACTOR	STORAGE TEMP.	OPERATING TEMP.	WARRANTY	CRI	INPUT POWER	HEAD BODY	LENS MATERIAL	LUMENS	COLOUR TEMP.	BATTERY TYPE & CAPACITY
EX400	WHW-A13-BB-GU	3V	4.5W	0.45	-10°C - 50°C	-20°C - 40°C	2 YEARS	85	4.5W	N/A	PC	N/A	6000K - 6500K	NI-MH 3.6V 1500mAH AA
EC402	WHW-A13-BB-GU-1					-25°C - 40°C		82	4.5W	THERMO PLASTIC		130 LM		NI-MH 3.6V 2500mAH SC

c UL us LISTED
NEMA 4X CERTIFIED
CAN ICES-005 (B) / NMB-005 (B)

1850 Wilson Ave. · Toronto, ON · M9M 1A1 • Tel: 416.741.7336 · Fax: 416.741.9104 • Toll Free in Canada: 1.800.661.9610
For sales/service questions - sales@etlin.com • www.etlin-daniels.com