ETLIN-DANIELS

INSTALLATION MANUAL FOR LED SURFACE MOUNT SMSWRNL



SAVE THESE INSTRUCTIONS - READ ALL INSTRUCTIONS CAREFULLY

⚠ WARNING

Intertek

CAN ICES-005 (B) / NMB-005 (B)

- To prevent personal injury or product damage only licensed electricians/personnel should install fixtures.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
- Wear rubber-soled shoes and work on a sturdy wooden ladder.
- This product must be installed following the National Electric Code (NEC) and all applicable Federal, State/Provincial and Local Electric Codes and Safety Standards.
- This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed following local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.
- Risk of cuts - Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.
- Account for small parts and destroy packaging material, as these may be hazardous to children.
- Risk of fire - Use 120VAC 50/60 Hz circuits.
- Suitable for damp locations - Indoor.
- Reliable operating temperature is -20 - +40 degrees Celcius (-4 to +104 degrees Fahrenheit)
- Please follow fire prevention regulations, do not cover the fixture with any heat-insulated materials.
- Do not change the LED light source or driver inside under any circumstance.


SIZE	WATTAGE	VOLTAGE	FREQUENCY	DIMENSION
7”	12W + 3W	120V	60Hz	189 x 16mm


WIRING INSTALLATION


Connect supply wires to wires in fixture wiring box with proper size wire nuts or push wires into “push-in” connector. Connect white to white, black to black, and green or bare copper wire. The ground wire at the service junction box may need to be secured to a ground screw.

SURFACE MOUNTING INSTALLATION

1) Fixing bracket on terminal box.
2) Connecting the wire.
3) Select desired color temperature by adjusting switch on back of fixture. 2700K / 3000K / 3500K / 4000K / 5000K. (DEFAULT SETTINGS: 3000K).
4) Push the light to the mounting bracket and rotate in the direction of the arrow.
5) Turn circuit back on

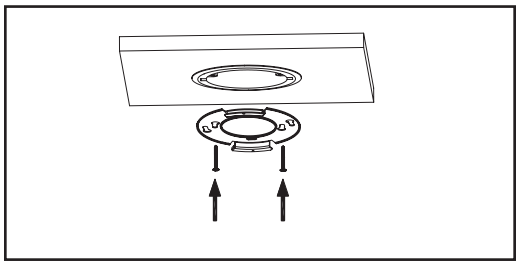

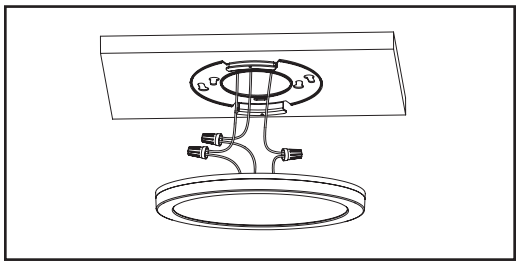

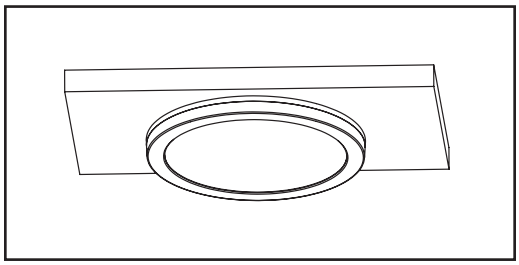

SELECTING NIGHT LIGHT MODE

- To turn on the main downlight: Turn on the light switch to activate the light fixture.
- To change to night light mode with the reduced light output from the trim ring: Switch the downlight off and back on again within 3 seconds to activate night light mode.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104 ·
Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)
www.etlin-daniels.com · For sales/service questions - sales@etlin.com