
ETLIN-DANIELS

PRODUCT CODE: CNM6-M80WCO-SB-BL

5 WATTAGE SELECTABLE & 3CCT SLIM LED GARAGE / CANOPY / PHOTOCELL / 6KV SURGE PROTECTION



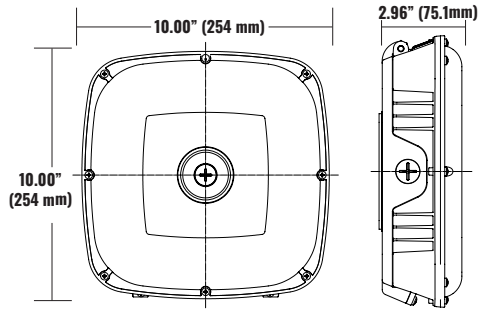

PRODUCT DESCRIPTION

The new ETLIN-DANIELS LED Garage / Canopy CNM6-M80WCO-SB-DB fixture features the latest in ease of installation, energy savings, and performance flexibility. Available in 120-347V, IP65 rated, and with 5 Wattage Selectable and 3CCT Selectable, the new CNM6 design is an excellent choice for lighting hallways, tunnels, building entrances and canopies, storage areas, service station canopies, and both underground and above ground parking facilities.

The CNM6 Series comes equipped with a photocell (can be disabled) and sensor base pre-installed, and optional Plug and Play Microwave or PIR Sensors offering Tri-Level Dimming.

FEATURES

- LED Indoor / Outdoor Light Source
- Low Profile design with durable powder coat finish.
- 135° beam angle to meet both Canopy & Garage DLC category
- 120-347V / IP65 / 0-10V Continuous Dimming
- IK10 / 6kv Surge Protection
- 5 Wattage Selectable – 20W, 40W, 60W, 70W, 80W
- 3CCT – 3000K, 4000K, 5000K
- Sensor Base Pre-Installed – optional PIR or Microwave Sensors
- Photocell Pre-Installed – can be disabled
- Fixtures can be surface of pendant mounted
- 5 Year Warranty
- L70 – 50,000 hours
- DLC6.0 Premium Certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	SYSTEM EFFICIENCY	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
2835	288	20W - 3000K - 3176LM / 4000K - 3199LM / 5000K - 3304LM 40W - 3000K - 6423LM / 4000K - 6572LM / 5000K - 6541LM 60W - 3000K - 9047LM / 4000K - 9516LM / 5000K - 9338LM 70W - 3000K - 10,054LM / 4000K - 10,656LM / 5000K - TBA 80W - 3000K - 11,429LM / 4000K - 12,348LM / 5000K - 12,150LM			150 LM /W	>80 CRI	>88%	95%	≥0.9%	≤20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120~347V	50-60HZ	ADC12 ALUMINUM/ POLYCARBONATE OPTICAL LENS INCLUDED	IP65	>50,000 HOURS	- 40˚C~+70˚C - 40˚F~+158˚F	- 40˚C~+50˚C - 40˚F~+122˚F	10 X 10 X 2.96 INCHES (254 X 254 X 75.1 MM)	10.78 X 10.70 X 3.89 INCHES (274 X 272 X 99 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	OPTIONAL ACCESSORIES
PENDANT MOUNTNG/ FLUSH MOUNTNG	BLACK	LV PIR / MICROWAVE SENSOR

CATALOG #		TYPE
PROJECT		
PREPARED BY		DATE

PRODUCT CODE: CNM6-M80WC0-SB-BL | **5 WATTAGE SELECTABLE & 3CCT SLIM LED GARAGE / CANOPY / PHOTOCELL / 6KV SURGE PROTECTION**

DLC LISTING

ED Model Number	Technical Requirements Version	Product ID	Listed Model Number	Category	Primary Use Designation
CNM6-M80WC0-SB-BL	DLC 6.0 Premium	TBA	CNM6-M80WC0-SB-BL	Outdoor Luminaires	Parking Garage Luminaires

CERTIFICATIONS

IK10 RATED

5 YEAR LIMITED WARRANTY

CAN ICES-005 (B) / NMB-005 (B)

DRIVER / LED CHIP

DIMMABLE

ACCESSORIES



LOW VOLTAGE MICROWAVE SENSOR - PART #: CNM6-SENMC-12V



LOW VOLTAGE PIR SENSOR - PART #: CNM6-SENPIR-12V



CNM6 REMOTE CONTROL - PART #: CNM6-RC

ORDERING INFORMATION - CNM SERIES

SERIES	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	CONTROLS	FINISH
CNM6	80	W	C	0	SB	BL
CNM6 - CANOPY SERIES 6	80 - 80W MAX	W = 120~347V	C = CHANGEABLE COLOR	0 - 0-10V DIMMABLE	SB = DC SENSOR	BL - BLACK
			TEMPERATURE -		BASE INSTALLED	
			3000K / 4000K / 5000K			

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com