
ETLIN-DANIELS

PRODUCT CODE: DLSWR4-121L5C9D-WHH-FF

4 INCH LED ULTRATHIN DOWNLIGHT - 5CCT SERIES



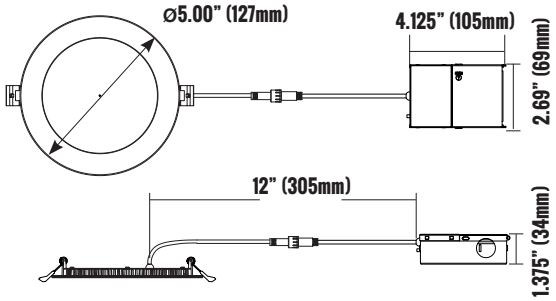

PRODUCT DESCRIPTION

Etlin-Daniels introduces our latest LED Recessed Ultrathin Downlights - the 121L5C9D series. This new generation is available with a 5CCT switch - providing for a choice between 2700K, 3000K, 3500K, 4000K & 5000K. This feature will reduce inventory stress and facilitate any potential color temperature decisions when doing the installations.
The new DLSWR4-121L5C9D-WHH-FF 4" fixture offers a modern and sleek looking energy efficient option for both new construction and retrofit / remodelling projects. It installs easily where there is limited ceiling space due to ductwork, joists and beams.
The new 121L5C9D design comes with a white trim - snap-on black, bronze and brushed nickel trims are available as options. And we are pleased to now offer a 6-pack "Contractor" Pack in the 4" design - DLSWR4-121L5C9D-WHH-FF-6P, which will reduce packaging and help to make larger installations more efficient.
Why waste time installing older space restrictive recessed options when the new Etlin-Daniels wet location rated, 5CCT Ultrathin provides a quick install solution, and elegant, superior illumination for your residential or commercial projects? Triac dimmable.

FEATURES

- LED Indoor Light Source
- 4" LED Downlight
- Durable air-tight aluminum body
- IC Air-Tight rated
- Wet location rated (indoor)
- Elegant white paint finish
- Etched white Polycarbonate diffuser lens for glare free illumination
- 2 spring loaded clips for mounting to any ceiling material
- 5CCT switch conveniently located allows choice of 2700K, 3000K, 3500K, 4000K, 5000K
- Default CT setting is 3000K
- Snap-on trims available in black, bronze & brushed nickel
- Triac dimmable
- 5 year warranty
- Energy Star Version 1.0 certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	VOLTAGES	SYSTEM EFFICACY	CRI	SYSTEM EFFICIENCY	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
HONGLI 2835	48 CHIPS	12W - 2700K - 1025 LM / 3000K - 1063 LM / 3500K - 1110 LM / 4000K - 1126 LM / 5000K - 1090 LM			INPUT - 120VAC OUTPUT - 24 - 36VDC	85.42 LM/W 88.58 LM/W 92.50 LM/W 93.83 LM/W 90.83 LM/W	>90 CRI	>0.96%	>80%	>0.90	<40%

PRODUCT SPECIFICATIONS

BEAM ANGLE	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120°	50-60HZ	ALUMINUM/ POLYCARBONATE LENS	>50,000 HOURS	- 40°C~+60°C - 40°F~+140°F	- 30°C~+40°C - 40°F~+104°F	Ø4.7 X 1 INCHES (120 X 24 MM)	5.31 X 5.31 X 2.55 INCHES (135 X 135 X 65MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
RECESSED CEILING MOUNT	WHITE WITH WHITE ETCHED DIFFUSER	TRIAC DIMMABLE DRIVER INCLUDED

ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			

PRODUCT CODE: DLSWR4-121L5C9D-WHH-FF | **4 INCH LED ULTRATHIN DOWNLIGHT - 5CCT SERIES**

ENERGY STAR LISTING

ED Model Number	Technical Requirements Version	ENERGY STAR Unique ID	Listed Model Number	Category	Primary Use Designation
DLSWR4-121L5C9D-WHH-FF	ES1.0 Down Light	3891080	DLSWR4-121L5C9D-**-FF	Indoor	Downlight Recessed

CERTIFICATIONS

Intertek · ENERGY STAR · IC RATED · AIR TIGHT · WET LOCATION · 5 YEAR LIMITED WARRANTY · RoHS 2002/95/EC

CAN ICES-005 (B) / NMB-005 (B)

DRIVER / LED CHIP

HONGLITRONIC

DIMMABLE

120V APPROVED DIMMERS

LUTRON: DVELV-300P · SELV-300P · SFTU-5A3P · DVCL-153P · CTCL-153P
LEVITON: IPE05-1LZ · 6615
WATTSTOPPER: HDCL-453M

ACCESSORIES




CLIP-ON TRIM BLACK PART# DLSTM4-BL
CLIP-ON TRIM BRUSHED NICKEL PART# DLSTM4-BN
CLIP-ON TRIM BRONZE PART# DLSTM4-BZ
(ARRIVING END MAY 2024)



120" EXTENSION CORD PART# DLSEC-120-FT4H-3P
240" EXTENSION CORD PART# DLSEC-240-FT4H-3P

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



DLSW4-MP - THICKNESS 0.73MM
DLSW4-MP-1 - THICKNESS 0.70MM

ORDERING INFORMATION - DLSWR SERIES

SERIES	SHAPE	SIZE	WATTAGE	VOLTAGE	LOW VOLTAGE OUTPUT	COLOR TEMPERATURE	CRI / DIMMABLE	COLOR	LENS
E.G. DLSW	R	4	12	1	L	5C	9D	WHH	FF
DLS - DOWNLIGHT SLIM	R - ROUND	4 - 4"	12 = 12W	1 = 120V	L - LOW VOLTAGE	5C - 5CCT	C - 90 CRI	WHH - WHITE	FF -
WET LOCATION					OUTPUT 24 - 36VDC	2700K, 3000K, 3500K,	D - TRIAC		FROSTED
						4000K, 5000K	DIMMABLE		

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLSWR4-MP WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104
Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)
www.etlin-daniels.com · For sales/service questions - sales@etlin.com