
ETLIN-DANIELS

PRODUCT CODE: DLSWRNL4-91L5C9D-WHN-FF

4 INCH LED ULTRATHIN DOWNLIGHT - 5CCT SERIES NIGHT LIGHT



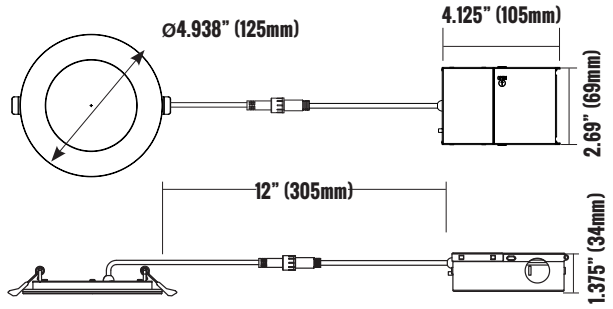

PRODUCT DESCRIPTION

Etlin-Daniels introduces the new DLSWRNL4-91L5C9D-WHN-FF Night Light LED Ultrathin. This slim recessed fixture is available with a 5CCT switch allowing for a choice between 2700K, 3000K, 3500K, 4000K and 5000K color temperatures.

This new Night Light Ultrathin 4" fixture offers a modern and sleek looking, energy efficient option for both new construction and retrofit / remodel projects. It installs easily where there is limited ceiling space due to duct-work, joists and beams.

This fixture will operate in its regular downlight mode when turned on. To activate the Night Light mode - a ring of 2200K light on the perimeter trim ring of the fixture only / no downlight - simply switch the downlight off and back on again within 3 seconds.

FEATURES

- LED Indoor Light Source
- 4" LED Downlight
- Durable aluminum body
- IC & Air-Tight rated
- Wet location rated (indoor)
- 90CRI
- Glare free illumination
- 2 spring loaded clips for mounting to any ceiling material
- 5CCT switch - 2700K, 3000K, 3500K, 4000K, 5000K
- Night Light Mode is 2200K for perimeter lighting only
- Triac dimmable
- 5 year warranty

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	VOLTAGES	SYSTEM EFFICACY	CRI	SYSTEM EFFICIENCY	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
HONGLI 2835	72 CHIPS	9W - 2700K - 705 LM / 3000K - 743 LM / 3500K - 781 LM / 4000K - 779 LM / 5000K - 758 LM - NL MODE - 150LM			INPUT - 120VAC OUTPUT - 24 - 36VDC	78.3 LM/W 82.5 LM/W 86.7 LM/W 86.5 LM/W 84.2 LM/W	>90 CRI	>0.96%	>80%	>0.90	<40%

PRODUCT SPECIFICATIONS

BEAM ANGLE	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120°	50-60HZ	ALUMINUM/ POLYCARBONATE LENS	>50,000 HOURS	-20°C~+40°C -4°F~+104°F	-30°C~+40°C -40°F~+104°F	Ø4.7 X 1 INCHES (125 X 25 MM)	5.3 X 5.3 X 2.70 INCHES (135 X 135 X 70MM)



ADDITIONAL INFORMATION	INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
	RECESSED CEILING MOUNT	WHITE WITH WHITE ETCHED DIFFUSER	TRIAC DIMMABLE DRIVER INCLUDED

ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			

PRODUCT CODE: DLSWRNL4-91L5C9D-WHN-FF

4 INCH LED ULTRATHIN DOWNLIGHT - 5CCT SERIES NIGHT LIGHT

CERTIFICATIONS

Intertek · ENERGY STAR · IC RATED · AIR TIGHT · WET LOCATION · 5 YEAR LIMITED WARRANTY · RoHS

CAN ICES-005 (B) / NMB-005 (B)

DRIVER / LED CHIP

HONGLITRONIC

DIMMABLE

120V APPROVED DIMMERS


LUTRON: DVELV-300P · SELV-300P · SFTU-5A3P · DVCL-153P · CTCL-153P
LEVITON: IPE05-1LZ · 6615
WATTSTOPPER: HDCL-453M

ACCESSORIES



120" EXTENSION CORD
PART# DLSEC-120-FT4-4P
240" EXTENSION CORD
PART# DLSEC-240-FT4-4P

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



DLSW4-MP - THICKNESS 0.73MM
DLSW4-MP-1 - THICKNESS 0.70MM

ORDERING INFORMATION - DLSWR SERIES

SERIES	RATED	SIZE	WATTAGE	VOLTAGE	LOW VOLTAGE OUTPUT	COLOR TEMPERATURE	CRI / DIMMABLE	COLOR	LENS
E.G. DLSWR	NL	4	9	1	L	5C	9D	WHN	FF
DLS - DOWNLIGHT SLIM	NL -	4 - 4"	9 = 9W	1 = 120V	L - LOW VOLTAGE	5C - 5CCT	C - 90 CRI	WHH - WHITE	FF -
WET LOCATION ROUND	NIGHT LIGHT				OUTPUT 24 - 36VDC	2700K, 3000K, 3500K,	D - TRIAC		FROSTED
						4000K, 5000K	DIMMABLE		

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLSWR4-MP WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104
Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)
www.etlin-daniels.com · For sales/service questions - sales@etlin.com