
ETLIN-DANIELS

PRODUCT CODE: CM214D-M2515CD -WH | **MULTI WATTAGE 5CCT LED FLUSHMOUNT/14 INCH ROUND PUFF**



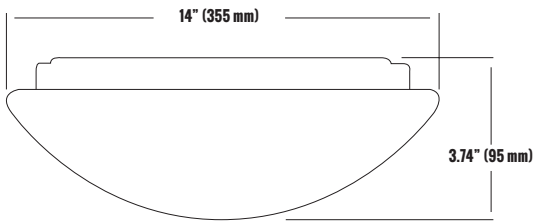

PRODUCT DESCRIPTION

The new Etlin-Daniels CM214D-M2515CD-WH LED Ceiling Flushmount fixture offers a compact and light weight design, glare free illumination, energy efficiency, long life, and easy installation.

Equipped with both a Multi-Wattage switch as well as a 5CCT Color Selection switch, the CM214D-M series is the perfect solution to either replace older and inefficient incandescent or CFL fixtures, or for new construction projects.

Applications include a wide range of residential, commercial, hospitality and healthcare facilities. The Driver-On-Board technology (DOB) is Triac Dimmable.

FEATURES

- LED Indoor Light Source.
- Low profile design.
- Durable polystyrene lens is removable for both installation and maintenance
- 3-Wattage Switch - 15W / 20W / 25W (Default 25W).
- 5CCT Switch - 2700K / 3000K / 3500K / 4000K / 5000K (Default 3000K)
- DOB technology.
- Triac Dimmable.
- Suitable for damp locations
- 5 year warranty
- L70 - 50,000 hours

PRODUCT SPECIFICATIONS (OPTICAL DATA) | PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	POWER FACTOR	HARMONIC DISTORTION
OSRAM 2835	90 CHIPS	15W - 2700K - 1501 LM / 3000K -1583 LM / 3500K - 1669 LM /4000K - 1713 LM / 5000K - 1713 LM 20W - 2700K - 1797 LM / 3000K -1910 LM / 3500K - 2026 LM /4000K - 2074 LM / 5000K - 2008 LM 25W - 2700K - 2283 LM / 3000K - 2442 LM / 3500K - 2616 LM /4000K - 2676 LM / 5000K - 2546 LM			93 - 102 LM /W	>80 CRI	>0.90	<40%

PRODUCT SPECIFICATIONS

BEAM ANGLE	VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120°	AC 120V	50-60HZ	STEEL/PS	>50,000 HOURS	-20°C~-45°C -4°F~-49°F	-20°C~-45°C -4°F~-49°F	14 x 3.74 INCHES (355 x 95 MM)	14.77 X 14.76 X 4.33 INCHES (375 X 375 X 110 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
FLUSH MOUNT - CEILING MOUNT	WHITE POLYSTYRENE	TRIAC DIMMABLE

ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			

PRODUCT CODE: CM214D-M2515CD -WH

MULTI WATTAGE 5CCT LED FLUSHMOUNT/14 INCH ROUND PUFF

CERTIFICATIONS

Intertek

RoHS 2002/95/EC

5 YEAR LIMITED WARRANTY

CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

DoB Driver on Board LED FLUSHMOUNT

DIMMABLE

OSRAM

ORDERING INFORMATION - CM SERIES

SERIES	SIZE	LED TYPE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. CM2	14	D	M25	1	5C	D	WH
CM2- CEILING MOUNT	14 - 14"	D - DRIVER ON BOARD	M25 =	1 = 120V	5C = 5CCT	D = TRIAC	WH = WHITE
			MULTI-WATTAGE -		2700K/ 3000K/ 3500K/ 4000K/		
			15W / 20W / 25W		5000K		

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com