
ER2 SERIES
5 - 12VDC EMERGENCY REMOTE HEADS



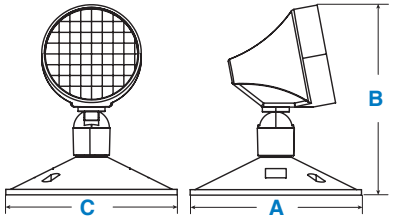

SINGLE HEADS										
SERIES	PART NUMBER	DIMENSIONS			COLOUR	SUPPLY VOLTAGE	WATTAGE	OUTPUT POWER	MAX. DISCHARGE CURRENT	LUMEN OUTPUT
		A	B	C						
ER250S	WH-UD5 *	5" 127 mm	5" 127 mm	5.5" 140 mm	WHITE	6 - 12VDC	1 x 5W	5W	910mA	377
ER270S	WH-UD7 *				WHITE		1 x 7W	7W	1250mA	410

DESIGN:
- High Impact ABS Thermoplastic.
- Fully Adjustable and lockable.
- Ceiling & Wallmount.
- Surface Mounting Holes to Match J-Box.
- White Available.
- Lumen Output Remains Stable Throughout Battery Discharge.
- Colour Temp.: 6000 - 6500K.
- IP20 Rating.
- Class II Safety Classification.

CIRCUITS:
- Supply Voltage 5W & 7W / 6-12VDC.
- Output Voltage 3V.
- Operating Temp 0-30˚C.
- Single Heads – 5W / 7W.
- Super Bright SMD LED.

CERTIFICATIONS:
- cCSAus
- Complies to CSA 22.2 #141-15
- Meets ICES-005 Requirements

*** - TO BE DISCONTINUED**

CAN ICES-005 (B) / NMB-005 (B)

1850 Wilson Ave. · Toronto, ON · M9M 1A1 • Tel: 416.741.7336 · Fax: 416.741.9104 • Toll Free in Canada: 1.800.661.9610
For sales/service questions - sales@etlin.com • www.etlin-daniels.com