CATALOG #		TYPE
PROJECT		
PREPARED BY		DATE


PRODUCT CODE: DLSWR6-1213D-BN-FF — 6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 663.7LM

HT	EAVG/EMAX	ANGLE: 112.41DEG	DIA
3.281FT 1M	8.277, 28.96FC 89.09, 311.8LX		9.80FT 298.84CM
6.562FT 2M	2.069, 7.241FC 22.27, 77.94LX		19.61FT 597.67CM
9.843FT 3M	0.9196, 3.218FC 9.899, 34.64LX		29.41FT 896.51CM
13.12FT 4M	0.5173, 1.810FC 5.568, 19.49LX		39.22FT 1195.34CM
16.4FT 5M	0.3311, 1.159FC 3.564, 12.47LX		49.02FT 1494.18CM

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

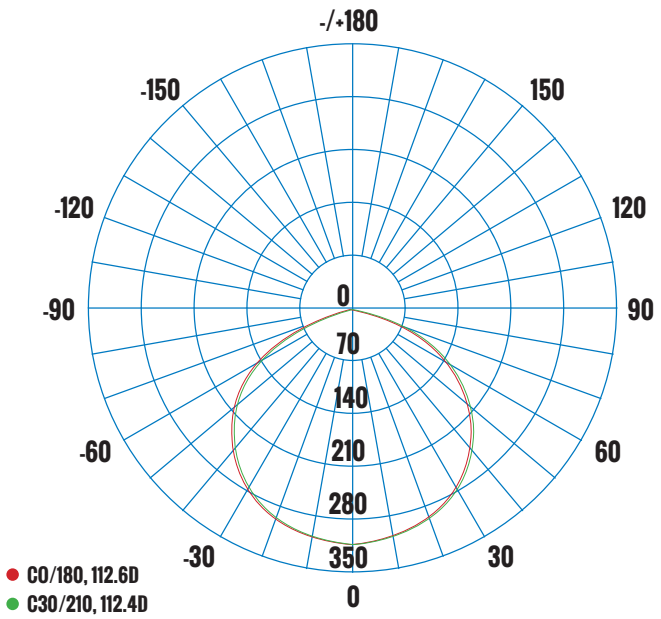

AVERAGE BEAM ANGLE(50%) 112.5DEG

CERTIFICATIONS

Intertek · ENERGY STAR · RoHS · 5 YEAR LIMITED WARRANTY · WET LOCATION

DRIVER / LED CHIP

HONGLITRONIC · DIMMABLE

120V APPROVED DIMMERS

LUTRON:
CTCL-153PDH · CTCL-153P · CT-600P
LEVITON:
6672 · 6674
COOPER:
HCL453PTCCCV6

ACCESSORIES




72" EXTENSION CORD
PART# DLSEC-72



120" EXTENSION CORD
PART# DLSEC-120

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



PART NO#: DLS6-MP

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS	TRIM
E.G. DLS	W	R	6	12	1	3	D	BN	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	6 - 6"	12 = 12W	1 = 120V	3 = 3000K	D - TRIAC	BN - BRUSHED	F - FROSTED	F - FIXED
	IP65							NICKEL		

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLS6-MP WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)


www.etlin-daniels.com · For sales/service questions - sales@etlin.com

CATALOG #		TYPE
PROJECT		
PREPARED BY		DATE


PRODUCT CODE: DLSWR6-1213D-WH-FF — 6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 663.7LM

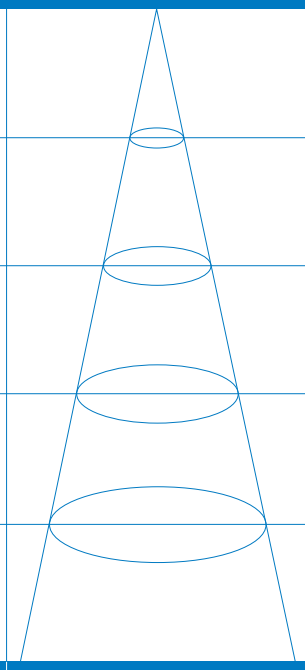3.281FT 1M	8.277, 28.96FC 89.09, 311.8LX		9.80FT 298.84CM
6.562FT 2M	2.069, 7.241FC 22.27, 77.94LX		19.61FT 597.67CM
9.843FT 3M	0.9196, 3.218FC 9.899, 34.64LX		29.41FT 896.51CM
13.12FT 4M	0.5173, 1.810FC 5.568, 19.49LX		39.22FT 1195.34CM
16.4FT 5M	0.3311, 1.159FC 3.564, 12.47LX		49.02FT 1494.18CM
HT	EAVG/EMAX	ANGLE: 112.41DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

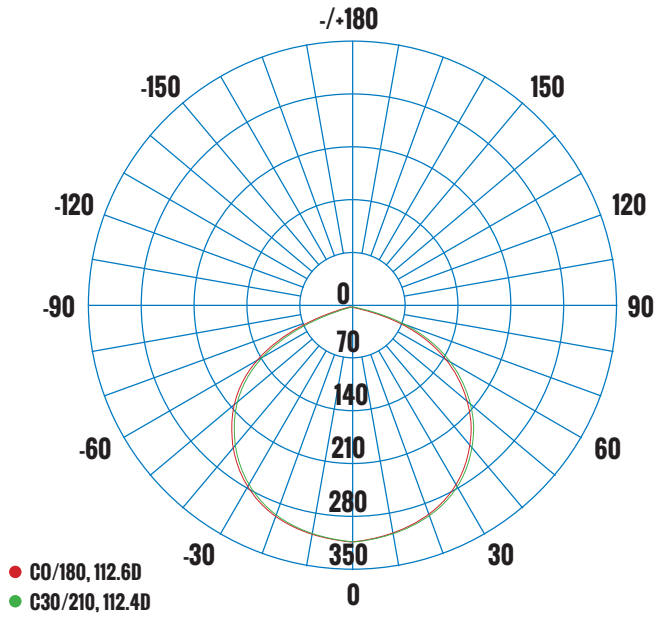

AVERAGE BEAM ANGLE(50%) 112.5DEG

CERTIFICATIONS

Intertek · ENERGY STAR · RoHS · 5 YEAR LIMITED WARRANTY · WET LOCATION

DRIVER / LED CHIP

HONGLITRONIC · DIMMABLE

120V APPROVED DIMMERS

LUTRON:
CTCL-153PDH · CTCL-153P · CT-600P
LEVITON:
6672 · 6674
COOPER:
HCL453PTCCCV6

ACCESSORIES



72" EXTENSION CORD
PART# DLSEC-72



120" EXTENSION CORD
PART# DLSEC-120

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



PART NO#: DLS6-MP

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOUR	LENS	TRIM
E.G. DLS	W	R	6	12	1	3	D	WH	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	6 - 6"	12 = 12W	1 = 120V	3 = 3000K	D - TRIAC	WH - WHITE	F - FROSTED	F - FIXED
	IP65									

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLS6-MP WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104
Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)
www.etlin-daniels.com · For sales/service questions - sales@etlin.com

ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			


PRODUCT CODE: DLSWR6-1214D-BN-FF — 6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 539.1LM

HT	EAVG/EMAX	ANGLE: 105.22DEG	DIA
3.281FT 1M	9.053, 26.92FC 97.45, 289.8LX		8.586FT 261.69CM
6.562FT 2M	2.263, 6.731FC 24.36, 72.45LX		17.17FT 523.37CM
9.843FT 3M	1.006, 2.991FC 10.83, 32.20LX		25.76FT 785.06CM
13.12FT 4M	0.5658, 1.683FC 6.091, 18.11LX		34.34FT 1046.75CM
16.4FT 5M	0.3621, 1.077FC 3.898, 11.591LX		42.93FT 1308.43CM

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

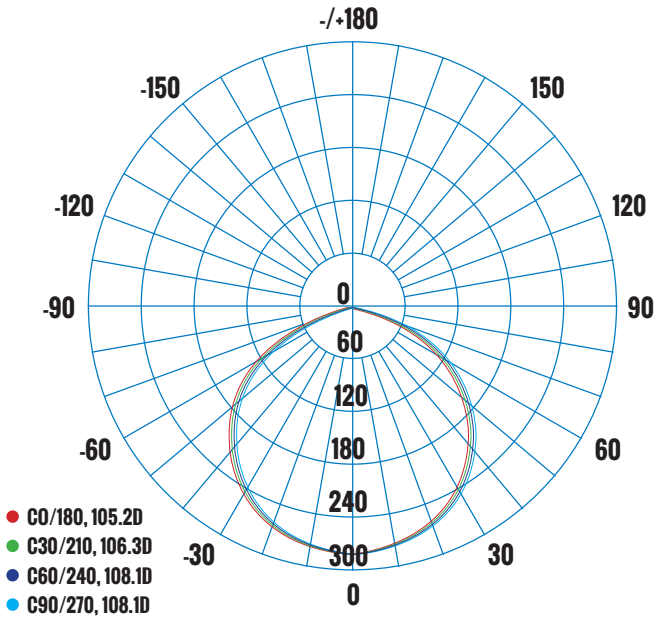

AVERAGE BEAM ANGLE(50%) 106.9DEG

CERTIFICATIONS

Intertek · ENERGY STAR · RoHS · 5 YEAR LIMITED WARRANTY · WET LOCATION

DRIVER / LED CHIP

HONGLITRONIC · DIMMABLE

120V APPROVED DIMMERS

LUTRON:
CTCL-153PDH · CTCL-153P · CT-600P
LEVITON:
6672 · 6674
COOPER:
HCL453PTCCCV6

ACCESSORIES




72" EXTENSION CORD
PART# DLSEC-72



120" EXTENSION CORD
PART# DLSEC-120

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



PART NO#: DLS6-MP

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOUR	LENS	TRIM
E.G. DLS	W	R	6	12	1	4	D	BN	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	6 - 6"	12 = 12W	1 = 120V	4 = 4000K	D - TRIAC	BN - BRUSHED	F - FROSTED	F - FIXED
	IP65							NICKEL		

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLS6-MP WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			


PRODUCT CODE: DLSWR6-1214D-WH-FF — 6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 539.1LM

HT	EAVG/EMAX	ANGLE: 105.22DEG	DIA
3.281FT 1M	9.053, 26.92FC 97.45, 289.8LX		8.586FT 261.69CM
6.562FT 2M	2.263, 6.731FC 24.36, 72.45LX		17.17FT 523.37CM
9.843FT 3M	1.006, 2.991FC 10.83, 32.20LX		25.76FT 785.06CM
13.12FT 4M	0.5658, 1.683FC 6.091, 18.11LX		34.34FT 1046.75CM
16.4FT 5M	0.3621, 1.077FC 3.898, 11.591LX		42.93FT 1308.43CM

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

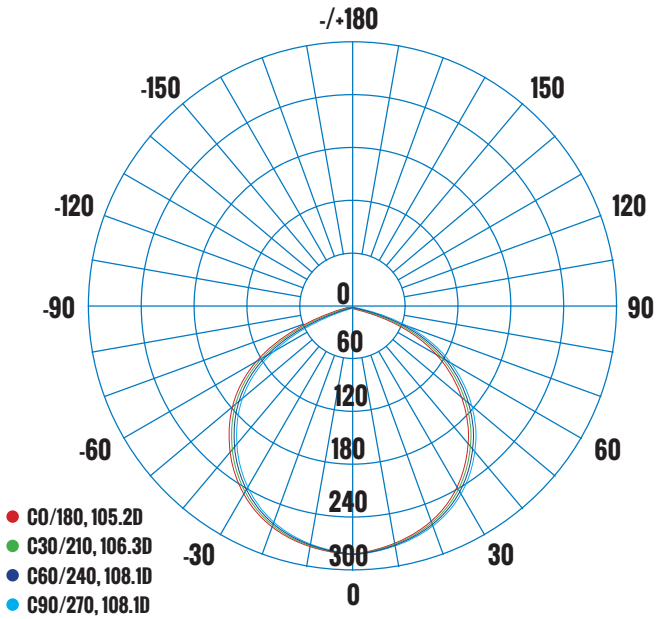

AVERAGE BEAM ANGLE(50%) 106.9DEG

CERTIFICATIONS

Intertek · ENERGY STAR · RoHS · 5 YEAR LIMITED WARRANTY · WET LOCATION

DRIVER / LED CHIP

HONGLITRONIC · DIMMABLE

120V APPROVED DIMMERS

LUTRON:
CTCL-153PDH · CTCL-153P · CT-600P
LEVITON:
6672 · 6674
COOPER:
HCL453PTCCCV6

ACCESSORIES



72" EXTENSION CORD
PART# DLSEC-72



120" EXTENSION CORD
PART# DLSEC-120

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



PART NO#: DLS6-MP

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS	TRIM
E.G. DLS	W	R	6	12	1	4	D	WH	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	6 - 6"	12 = 12W	1 = 120V	4 = 4000K	D - TRIAC	WH - WHITE	F - FROSTED	F - FIXED
	IP65									

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLS6-MP WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)


www.etlin-daniels.com · For sales/service questions - sales@etlin.com

CATALOG #		TYPE
PROJECT		
PREPARED BY		DATE


PRODUCT CODE: DLSWRH6-1513D-BN-FF — 6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT/HEAT SINK

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 817.8LM

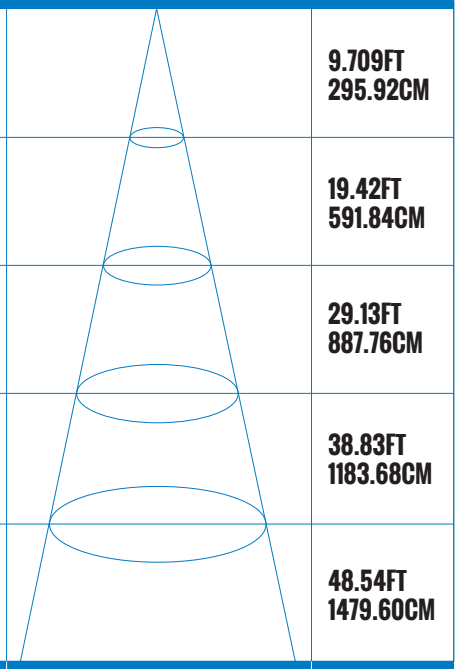3.281FT 1M	11.00, 36.84FC 118.4, 396.51LX		9.709FT 295.92CM
6.562FT 2M	2.751, 9.209FC 29.61, 99.13LX		19.42FT 591.84CM
9.843FT 3M	1.222, 4.093FC 13.16, 44.06LX		29.13FT 887.76CM
13.12FT 4M	0.6877, 2.302FC 7.402, 24.78LX		38.83FT 1183.68CM
16.4FT 5M	0.4401, 1.472FC 4.737, 15.86LX		48.54FT 1479.60CM
HT	EAVG/EMAX	ANGLE: 111.89DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

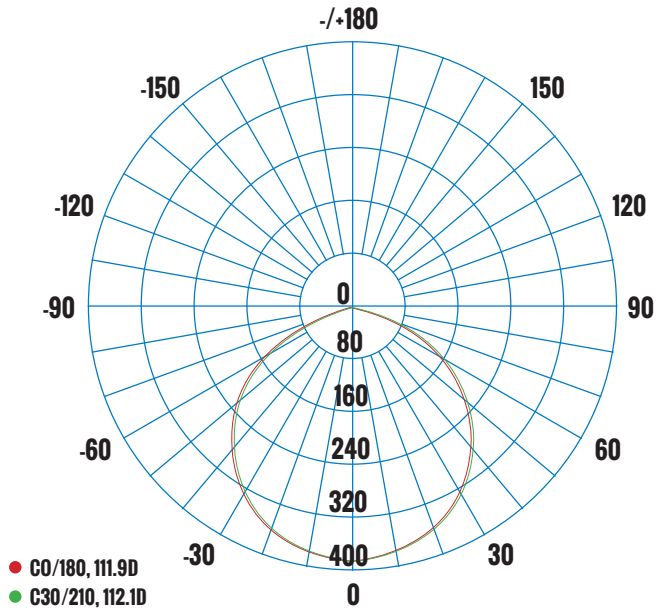

AVERAGE BEAM ANGLE(50%) 112.0DEG

CERTIFICATIONS

Intertek · ENERGY STAR · RoHS · 5 YEAR LIMITED WARRANTY · WET LOCATION

DRIVER / LED CHIP

HONGLITRONIC · DIMMABLE

120V APPROVED DIMMERS

LUTRON:
CTCL-153PDH · CTCL-153P · CT-600P
LEVITON:
6672 · 6674
COOPER:
HCL453PTCCCV6

ACCESSORIES




72" EXTENSION CORD
PART# DLSEC-72



120" EXTENSION CORD
PART# DLSEC-120

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



PART NO#: DLS6-MP

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	HEAT DISSIPATION	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS	TRIM
E.G. DLS	W	R	H	6	15	1	3	D	BN	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	H - HEAT SINK	6 - 6"	15 = 15W	1 = 120V	3 = 3000K	D - TRIAC	BN - BRUSHED	F - FROSTED	F - FIXED
	IP65								NICKEL		

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)


www.etlin-daniels.com · For sales/service questions - sales@etlin.com

CATALOG #		TYPE
PROJECT		
PREPARED BY		DATE


PRODUCT CODE: DLSWRH6-1513D-WH-FF — 6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT/HEAT SINK

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 817.8LM

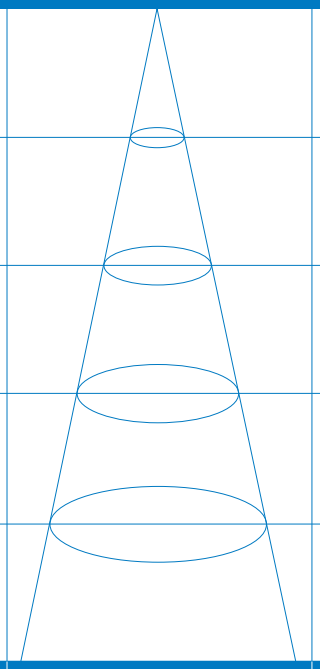3.281FT 1M	11.00, 36.84FC 118.4, 396.51LX		9.709FT 295.92CM
6.562FT 2M	2.751, 9.209FC 29.61, 99.13LX		19.42FT 591.84CM
9.843FT 3M	1.222, 4.093FC 13.16, 44.06LX		29.13FT 887.76CM
13.12FT 4M	0.6877, 2.302FC 7.402, 24.78LX		38.83FT 1183.68CM
16.4FT 5M	0.4401, 1.472FC 4.737, 15.86LX		48.54FT 1479.60CM
HT	EAVG/EMAX	ANGLE: 111.89DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

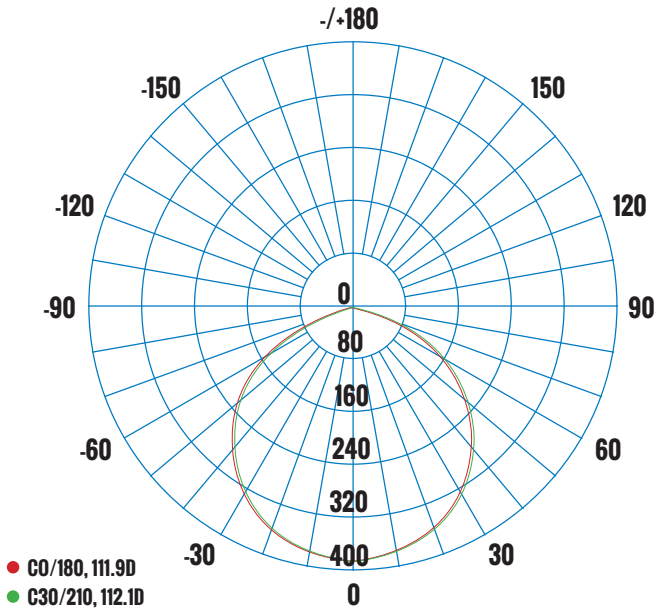

AVERAGE BEAM ANGLE(50%) 112.0DEG

CERTIFICATIONS

Intertek · ENERGY STAR · RoHS · 5 YEAR LIMITED WARRANTY · WET LOCATION

DRIVER / LED CHIP

HONGLITRONIC · DIMMABLE

120V APPROVED DIMMERS

LUTRON:
CTCL-153PDH · CTCL-153P · CT-600P
LEVITON:
6672 · 6674
COOPER:
HCL453PTCCCV6

ACCESSORIES



72" EXTENSION CORD
PART# DLSEC-72



120" EXTENSION CORD
PART# DLSEC-120

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



PART NO#: DLS6-MP

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	HEAT DISSIPATION	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS	TRIM
E.G. DLS	W	R	H	6	15	1	3	D	WH	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	H - HEAT SINK	6 - 6"	15 = 15W	1 = 120V	3 = 3000K	D - TRIAC	WH - WHITE	F - FROSTED	F - FIXED
	IP65										

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com

ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			


PRODUCT CODE: DLSWRH6-1514D-BN-FF — 6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT/HEAT SINK

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 672.9LM

3.281FT 1M	11.72, 33.90FC 126.1, 364.9LX		8.545FT 260.46CM
6.562FT 2M	2.929, 8.475FC 31.53, 91.22LX		17.09FT 520.92CM
9.843FT 3M	1.302, 3.767FC 14.01, 40.54LX		25.64FT 781.38CM
13.12FT 4M	0.7322, 2.119FC 7.882, 22.81LX		34.18FT 1041.84CM
16.4FT 5M	0.4686, 1.356FC 5.044, 14.60LX		42.73FT 1302.30CM
HT	EAVG/EMAX	ANGLE: 104.96DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

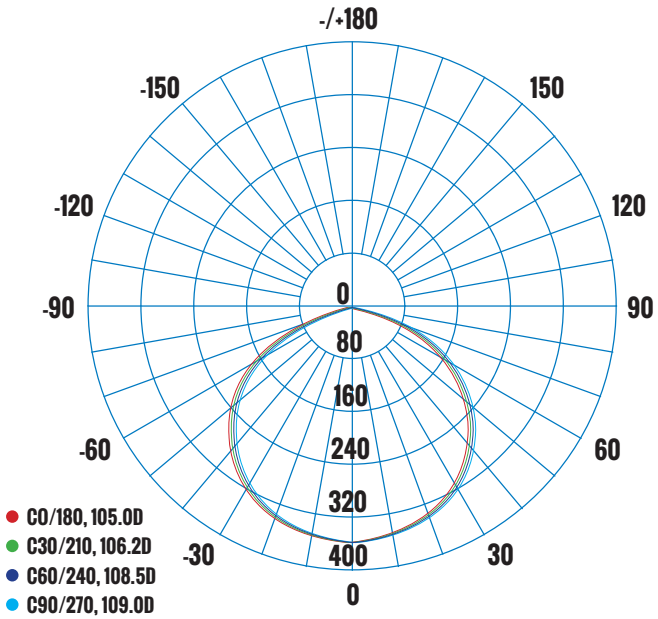

AVERAGE BEAM ANGLE(50%) 107.2DEG

CERTIFICATIONS

Intertek · ENERGY STAR · RoHS · 5 YEAR LIMITED WARRANTY · WET LOCATION

DRIVER / LED CHIP

HONGLITRONIC · DIMMABLE

120V APPROVED DIMMERS

LUTRON:
CTCL-153PDH · CTCL-153P · CT-600P
LEVITON:
6672 · 6674
COOPER:
HCL453PTCCCV6

ACCESSORIES




72" EXTENSION CORD
PART# DLSEC-72



120" EXTENSION CORD
PART# DLSEC-120

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



PART NO#: DLS6-MP

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	HEAT DISSIPATION	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS	TRIM
E.G. DLS	W	R	H	6	15	1	4	D	BN	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	H - HEAT SINK	6 - 6"	15 = 15W	1 = 120V	4 = 4000K	D - TRIAC	BN - BRUSHED	F - FROSTED	F - FIXED
	IP65								NICKEL		

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com

ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			


PRODUCT CODE: DLSWRH6-1514D-WH-FF — 6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT/HEAT SINK

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 672.9LM

3.281FT 1M	11.72, 33.90FC 126.1, 364.9LX		8.545FT 260.46CM
6.562FT 2M	2.929, 8.475FC 31.53, 91.22LX		17.09FT 520.92CM
9.843FT 3M	1.302, 3.767FC 14.01, 40.54LX		25.64FT 781.38CM
13.12FT 4M	0.7322, 2.119FC 7.882, 22.81LX		34.18FT 1041.84CM
16.4FT 5M	0.4686, 1.356FC 5.044, 14.60LX		42.73FT 1302.30CM
HT	EAVG/EMAX	ANGLE: 104.96DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

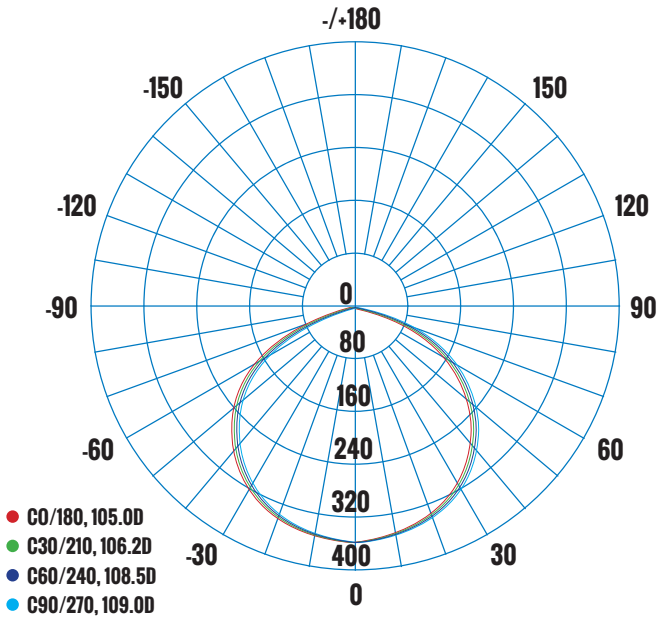

AVERAGE BEAM ANGLE(50%) 107.2DEG

CERTIFICATIONS

Intertek · ENERGY STAR · RoHS · 5 YEAR LIMITED WARRANTY · WET LOCATION

DRIVER / LED CHIP

HONGLITRONIC · DIMMABLE

120V APPROVED DIMMERS

LUTRON:
CTCL-153PDH · CTCL-153P · CT-600P
LEVITON:
6672 · 6674
COOPER:
HCL453PTCCCV6

ACCESSORIES



72" EXTENSION CORD
PART# DLSEC-72



120" EXTENSION CORD
PART# DLSEC-120

PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.



PART NO#: DLS6-MP

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	HEAT DISSIPATION	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS	TRIM
E.G. DLS	W	R	H	6	15	1	4	D	WH	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	H - HEAT SINK	6 - 6"	15 = 15W	1 = 120V	4 = 4000K	D - TRIAC	WH - WHITE	F - FROSTED	F - FIXED
	IP65										

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com