

ETLIN-DANIELS

PRODUCT CODE: FLL5-M60UC0-DB-PC-3 | MULTI-WATTAGE COLOR SELECTABLE LOW WATTAGE LED FLOOD LIGHT

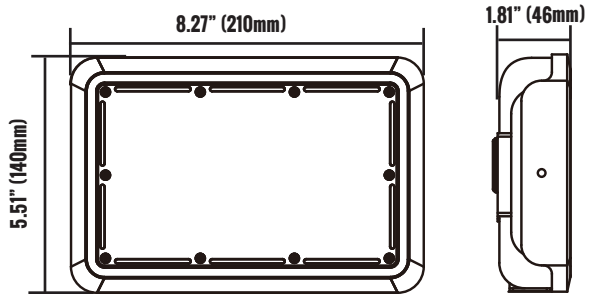

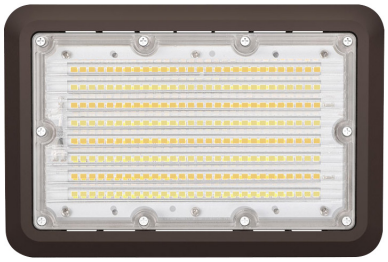

PRODUCT DESCRIPTION

The new Etlin-Daniels FLL5 offers excellent illumination along with color temperature, wattage and mounting bracket flexibility. Complete with a Multi-Wattage Dip Switch offering a choice between 40W/50W/60W, and a 3CCT Dip Switch allowing for a choice between 3000K/4000K/5000K, the new FLL5 does not come equipped with a pre-installed mounting bracket. The customer can choose between a Yoke or Knuckle option and the pre-installed photocell can be disabled if not required.

Wet Location Rated with a corrosion resistant die cast aluminum housing, the FLL5 will provide long lasting, glare free, energy saving illumination for a wide variety of residential, commercial and industrial applications.

For further energy savings, take advantage of the 0-10V Continuous Dimming.

FEATURES

- Outdoor LED Light Source
- Compact die cast aluminum housing
- 120-277V
- 3CCT - 3000K/4000K/5000K
- Multi-Wattage - 40W/50W/60W
- On / Off Photocell pre-installed
- 3 foot whip pre-installed
- IP65 - Wet Location Rated
- 5 year warranty
- L70 - 50,000 hours
- DLC premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	BEAM ANGLE	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILEDS	240 CHIPS	40W - 3000K - 5951 LM / 4000K - 6399 LM / 5000K - 6423 LM 50W - 3000K - 6981 LM / 4000K - 7762 LM / 5000K - 7380 LM 60W - 3000K - 8201 LM / 4000K - 9229 LM / 5000K - 8943 LM			137 - 160 LM/W	>70 CRI	100° / 110°	>86%	>0.90	<20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120~277V	50-60HZ	STEEL/FROSTED LENS	>50,000 HOURS	-40°C~+85°C -40°F~+185°F	-40°C~+45°C -40°F~+113°F	8.27 X 5.51 X 1.8 INCHES (210 X 140 X 46 MM)	8.27 X 9.25 X 2 INCHES (210 X 235 X 52 MM)



ADDITIONAL INFORMATION	INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
	YOKE OR KNUCKLE MOUNT	DARK BRONZE	0-10V CONTINUOUS DIMMING

ETLIN-DANIELS

PRODUCT CODE: FLL5-M60UC0-DB-PC-3 | **MULTI-WATTAGE COLOR SELECTABLE LOW WATTAGE LED FLOOD LIGHT**

DLC LISTING

ED Model Number	Technical Requirements Version	Product ID	Listed Model Number	Category	Primary Use Designation
FLL5-M60UC0-DB-PC-3	DLC 5.1 Premium	S-82VE4L	FLL5-M60UC0-DB-PC-3	Outdoor Luminaires	Architectural Flood and Spot Luminaires

CERTIFICATIONS

c UL us LISTED · DLC · 5 YEAR LIMITED WARRANTY

CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

LUMILEDS

MOUNTING OPTIONS/ACCESSORIES



KNUCKLE MOUNT
PART#: FL5-KN-DB



YOKE MOUNT
PART#: FLL5-YK-DB

ORDERING INFORMATION - FLL5 SERIES

SERIES	WATTS	VOLTAGE	COLOR TEMPERATURE	FINISH	PHOTOCELL	CABLE
E.G. FLL5	M60	U	C	DB	PC	3
FLL5 - LOW WATTAGE	M60 =	U = 120-277V	C = CHANGEABLE COLOR	DB - DARK BRONZE	PC - PHOTOCELL	3 - 3'
FLOOD LIGHT	MULTI-WATTAGE		3000K / 4000K /			CONDUCTOR CABLE
	40W / 50W / 60W		5000K			

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com