
ETLIN-DANIELS

PRODUCT CODE: FLS5-15UC0-DB-PC-3

COLOR SELECTABLE LOW WATTAGE LED FLOOD LIGHT





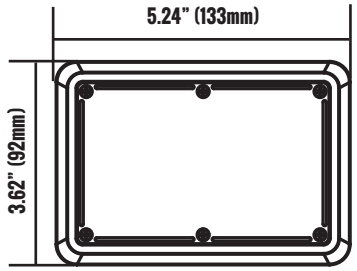

PRODUCT DESCRIPTION

The new Etlin-Daniels FLS5 offers excellent illumination and color temperature and mounting bracket flexibility. At only 15W, the FLS5 comes equipped with a 3CCT switch offering a choice between 3000K, 4000K and 5000K. And, as the new FL5S does not come equipped with a pre-installed mounting bracket, you get to choose between a Yoke or Knuckle option. And the Pre-Installed Photocell can be disabled if not required.

Wet Location Rated with a corrosion resistant die cast aluminum housing, the FLS5 will provide long lasting, glare free, energy saving illumination for a wide variety of residential, commercial and industrial applications.

For further energy savings, take advantage of the 0-10V Continuous Dimming.

FEATURES

- Outdoor LED Light Source
- Compact die cast aluminum housing
- 120-277V
- 3CCT - 3000K/4000K/5000K
- On / Off Photocell pre-installed
- 3 foot whip pre-installed
- IP65 - Wet Location Rated
- 5 year warranty
- L70 - 50,000 hours
- DLC premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	BEAM ANGLE	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILEDS	56 CHIPS	15W - 3000K - 1994 LM / 4000K - 2135 LM / 5000K - 2064 LM			>130LM/W	>70 CRI	100° / 110°	>86%	>0.90	<20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120~277V	50-60HZ	STEEL/FROSTED LENS	>50,000 HOURS	-40°C~+85°C -40°F~+185°F	-40°C~+45°C -40°F~+113°F	3.62 X 5.24 X 1.8 INCHES (92 X 133 X 46 MM)	5.23 X 6.19 X 2 INCHES (133 X 155 X 52 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
YOKE OR KNUCKLE MOUNT	DARK BRONZE	0-10V CONTINUOUS DIMMING

ETLIN-DANIELS

PRODUCT CODE: FLS5-15UC0-DB-PC-3 | **COLOR SELECTABLE LOW WATTAGE LED FLOOD LIGHT**

DLC LISTING

ED Model Number	Technical Requirements Version	Product ID	Listed Model Number	Category	Primary Use Designation
FLS5-15UC0-DB-PC-3	DLC 5.1 Premium	S-4GVSEX	FLS5-15UC0-DB-PC-3	Outdoor Luminaires	Architectural Flood and Spot Luminaires

CERTIFICATIONS

c UL us LISTED · DLC LISTED · 5 YEAR LIMITED WARRANTY

CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

LUMILEDS

MOUNTING OPTIONS/ACCESSORIES



KNUCKLE MOUNT
PART#: FL5-KN-DB



YOKE MOUNT
PART#: FLS5-YK-DB

ORDERING INFORMATION - FLS5 SERIES

SERIES	WATTS	VOLTAGE	COLOR TEMPERATURE	FINISH	PHOTOCELL	CABLE
E.G. FLS5	15	U	C	DB	PC	3
FLS5 - LOW WATTAGE	15 = 15W	U = 120-277V	C = CHANGEABLE COLOR	DB - DARK BRONZE	PC - PHOTOCELL	3 - 3'
FLOOD LIGHT			3000K / 4000K /			CONDUCTOR CABLE
			5000K			

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com