
ETLIN-DANIELS

PRODUCT CODE: CM214D-2515CD -WH | **5CCT LED FLUSHMOUNT/14 INCH ROUND PUFF/SLIM PROFILE**



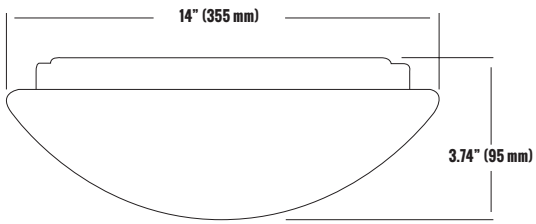

PRODUCT DESCRIPTION

The new Etlin-Daniels CM211D-1515CD and CM214D-2515CD LED Ceiling Flushmount fixtures offer the latest in compact and light weight design, even illumination, energy efficiency and value.
These easy to install luminaires feature a 5CCT switch, providing 2700K / 3000K / 3500K / 4000K and 5000K options.
These new color selectable fixtures provide a cost efficient solution to either replace older incandescent or compact fluorescent ceiling fixtures, or for new construction projects.

Applications include a wide range of residential, commercial, hospitality and healthcare facilities. The driver on board technology (DOB) is Triac Dimmable. Available in 11" and 14".

FEATURES

- LED Indoor Light Source.
- Low profile design.
- Durable polystyrene lens is removable for both installation and servicing
- 5CCT Switch - 2700K / 3000K / 3500K / 4000K / 5000K
- DOB technology.
- Triac Dimmable.
- Suitable for damp locations
- 5 year warranty
- L70 - 50,000 hours
- Energy Star certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	POWER FACTOR	HARMONIC DISTORTION
OSRAM 2835	90 CHIPS	25W - 2700K - 2324 LM / 3000K - 2436 LM / 3500K - 2532 LM 4000K - 2527 LM / 5000K - 2458 LM			93 - 102 LM /W	>80 CRI	>0.90	<40%

PRODUCT SPECIFICATIONS

BEAM ANGLE	VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120°	AC 120V	50-60HZ	STEEL/PS	>50,000 HOURS	-20°C~-45°C -4°F~-49°F	-20°C~-45°C -4°F~-49°F	14 x 3.74 INCHES (355 x 95 MM)	14.77 X 14.76 X 4.33 INCHES (375 X 375 X 110 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
FLUSH MOUNT - CEILING MOUNT	WHITE POLYSTYRENE	TRIAC DIMMABLE

ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			

PRODUCT CODE: CM214D-2515CD -WH | **5CCT LED FLUSHMOUNT/14 INCH ROUND PUFF/SLIM PROFILE**

ENERGY STAR LISTING

ED Model Number	Technical Requirements Version	ENERGY STAR Unique ID	Listed Model Number	Category	Primary Use Designation
CM214D-2515CD-WH	ES2.0	2398070	CM214D-2515CD-WH	Indoor	Ceiling Mount

CERTIFICATIONS

Intertek · ENERGY STAR · CAL. T24 2005 · RoHS 2002/95/EC · 5 YEAR LIMITED WARRANTY

CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

DoB Driver on Board LED FLUSHMOUNT · DIMMABLE · OSRAM

ORDERING INFORMATION - CM SERIES

SERIES	SIZE	LED TYPE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. CM2	14	D	25	1	5C	D	WH
CM2- CEILING MOUNT	14 - 14"	D - DRIVER ON BOARD	25 = 25W	1 = 120V	5C = 5CCT	D = TRIAC	WH = WHITE
					2700K/ 3000K/ 3500K/ 4000K/		
					5000K		

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com