
ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			

PRODUCT CODE: CM214D-251WHPS4D | LED FLUSHMOUNT/14 INCH ROUND PUFF/LOW PROFILE | A17



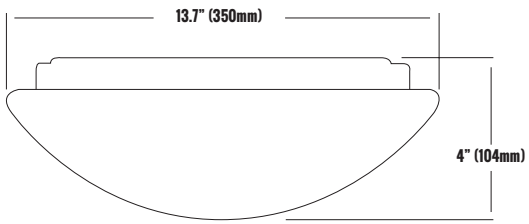

CEILING FLUSH MOUNTS

PRODUCT DESCRIPTION

The Etlin-Daniels CM214D-251WHPS4D LED Ceiling Flushmount offers the latest in compact design, even illumination, energy efficiency and value. This easy to install fixture features a durable polystyrene lens and is a cost-efficient solution to either replace older incandescent or compact fluorescent ceiling fixtures, or for new construction. Applications include a wide range of residential, commercial, hospitality and healthcare facilities. The driver-on-board technology is Triac dimmable. Available in both 3000K & 4000K

FEATURES

- LED Indoor Light Source.
- Low profile design.
- Durable polystyrene lens is removable for both installation and maintenance
- Driver-On-Board technology.
- Suitable for damp locations
- Triac Dimmable.
- 5 year warranty
- L70 - 50,000 hours
- Energy Star certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
DOB 2835	42 CHIPS	64LM/W	1600LM	4000K	120°	>80CRI	>85%	AC120V	60HZ	>81%	>0.90	<20%

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
25W	STEEL/PS	>50,000 HOURS	-20°C~-45°C -4°F~-49°F	-20°C~-45°C -4°F~+113°F	14 x 4.125 INCHES (355.6 x 104.775 MM)	18.7 X 15.35 X 15.55 INCHES (475 X 390 X 395 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR/DIFFUSER	CONTROL TYPE
FLUSH MOUNT - CEILING MOUNT	WHITE POLYSTYRENE	TRIAC DIMMABLE


ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			


PRODUCT CODE: CM214D-251WHPS4D | **LED FLUSHMOUNT/14 INCH ROUND PUFF/LOW PROFILE**

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 1104LM

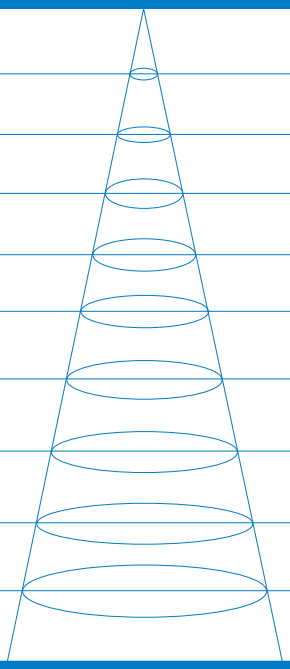3.28FT 1M	91.25,435.3LX		12.34FT 3.76M
6.56FT 2M	22.81,108.8LX		24.67FT 7.52M
9.84FT 3M	10.14,48.36LX		37.04FT 11.29M
13.12FT 4M	5.703,27.21LX		49.38FT 15.05M
16.40FT 5M	3.650,17.41LX		61.71FT 18.81M
19.69FT 6M	2.535,12.091LX		74.05FT 22.57M
22.97FT 7M	1.862,8.883LX		86.42FT 26.34M
26.25FT 8M	1.426,6.801LX		98.75FT 30.10M
29.52FT 9M	1.127,5.374LX		111.09FT 33.86M
32.80FT 10M	0.9125,4.353LX		123.43FT 37.62M
HT	EAVG/EMAX	ANGLE: 124.01DEG	DIA

ISOCANDELA DIAGRAM (PERCENT OF MAXIMUM INTENSITY)

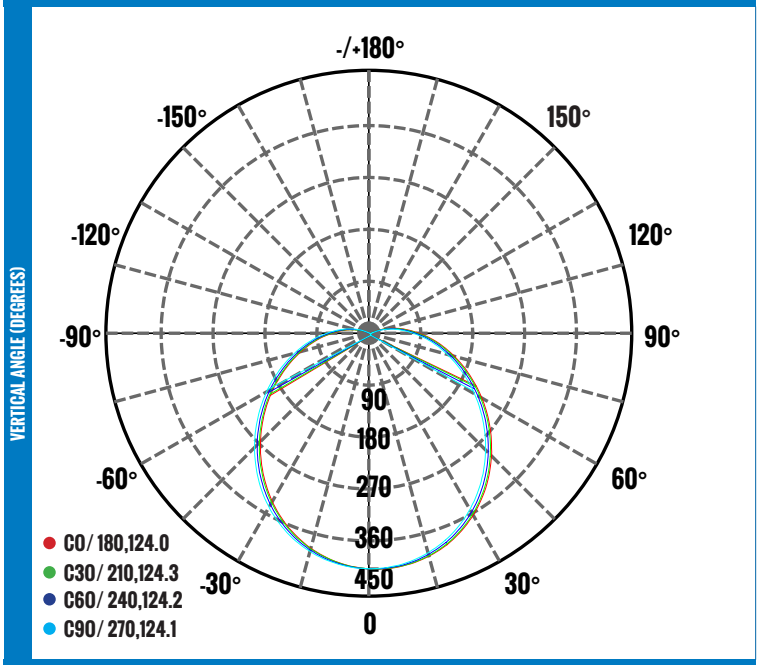

AVERAGE BEAM ANGLE (124.2 DEGREES)

CERTIFICATIONS

c UL us LISTED · ENERGY STAR · CAL. T24 2005 · RoHS 2002/95/EC · 5 YEAR LIMITED WARRANTY

DRIVER/LED CHIP

DoB Driver on Board LED FLUSHMOUNT · DIMMABLE · SAMSUNG

ORDERING INFORMATION - CM SERIES

SERIES	SIZE	LED TYPE	WATTAGE	VOLTAGE	FINISH	DIFFUSER	COLOR TEMPERATURE	DIMMABLE
E.G. CM2	14	D	25	1	WH	PS	4	D
CM2- CEILING MOUNT	14 - 14"	D - DRIVER ON BOARD	25 = 25W	1 = 120V	WH=WHITE	PS - POLYSTYRENE	4 = 4000K	D = TRIAC

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com