
ETLIN-DANIELS

PRODUCT CODE: CMM316D-251BNPS3D | LED FLUSHMOUNT/16 INCH SPILL RING/LOW PROFILE



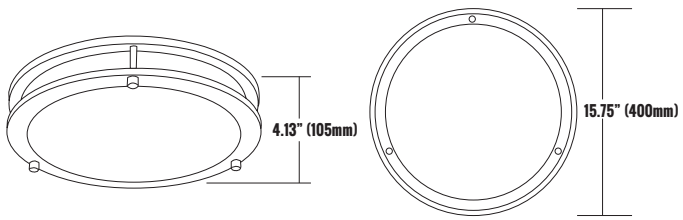

PRODUCT DESCRIPTION

The new generation of Etlin-Daniels CMM316D-251BNPS3D (& CMM316D-251BNPS4D) LED Spill Ring Ceiling Flushmount offers the latest in compact design, even and glare free illumination, energy efficiency and value. This easy-to-install fixture features a durable polystyrene lens and is a cost-efficient solution to replace either older incandescent or compact fluorescent ceiling fixtures, or for new construction.

The Brushed Nickel accents enhance any hallway, lobby, foyer, bedroom or bathroom, and meeting room in residential, commercial, healthcare and hospitality applications. The driver-on-board technology is Triac dimmable. Available in 3000K & 4000K

FEATURES


- LED Indoor Light Source
- Low profile 16" design
- Durable polystyrene lens is easily removed for both installation and maintenance
- Brushed Nickel Spill-Ring accents
- Driver-On-Board technology
- Suitable for damp locations
- 5 year warranty.
- L70 - 50,000 hours.
- Energy Star certified.

PRODUCT SPECIFICATIONS (OPTICAL DATA) | PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQUENCY	POWER FACTOR	HARMONIC DISTORTION
DOB 2835	56 CHIPS	70LM/W	1750LM	3000K	120°	>80CRI	>85%	AC120V	50 - 60HZ	>0.90	<50%

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
25W	STEEL/PS	>50,000 HOURS	-40°C~-60°C -40°F~-140°F	-25°C~-45°C -13°F~-113°F	15.75 x 4.13 INCHES (400 x 105 MM)	16.73 X 16.73 X 4.72 INCHES (425 X 425 X 120 MM)

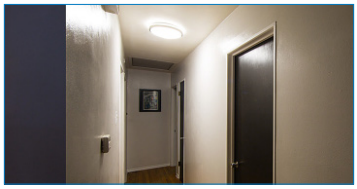

ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR/DIFFUSER	CONTROL TYPE
FLUSH MOUNT - CEILING MOUNT	BRUSHED NICKEL/POLYSTYRENE WHITE	TRIAC DIMMABLE

ETLIN-DANIELS

PRODUCT CODE: CMM316D-251BNPS3D | **LED FLUSHMOUNT/16 INCH SPILL RING/LOW PROFILE**

ENERGY STAR LISTING

ED Model Number	Technical Requirements Version	ENERGY STAR Unique ID	Listed Model Number	Category	Primary Use Designation
CMM316D-251BNPS3D	ES2.0	2334974	CMM316D-251BNPS3D	Indoor	Ceiling Mount

CERTIFICATIONS

c UL us LISTED · ENERGY STAR · CAL. T24 2005 · RoHS 2002/95/EC · 5 YEAR LIMITED WARRANTY

DRIVER/LED CHIP

DoB Driver on Board LED FLUSHMOUNT · DIMMABLE · SAMSUNG

ORDERING INFORMATION - CM SERIES

SERIES	SIZE	LED TYPE	WATTAGE	VOLTAGE	FINISH	DIFFUSER	COLOR TEMPERATURE	DIMMABLE
E.G. CMM3	16	D	25	1	BN	PS	3	D
CMM3 -	16 - 16"	D - DRIVER ON BOARD	25 = 25W	1 = 120V	BN - BRUSHED NICKEL	PS - POLYSTYRENE	3 = 3000K	D = TRIAC
CEILING MOUNT								

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com