
ETLIN-DANIELS

PRODUCT CODE: CM316SD-2515CD-BN

5CCT LED FLUSHMOUNT/16 INCH ROUND SPILL RING/LOW PROFILE



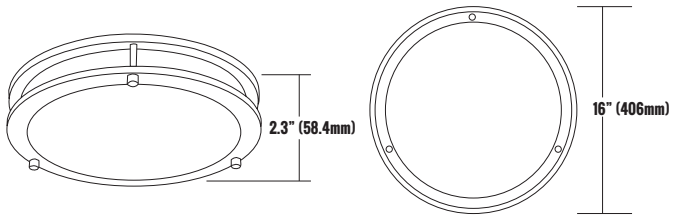

PRODUCT DESCRIPTION

The new generation of Etlin-Daniels CM316SD-2515CD-BN LED Spill Ring Ceiling Flushmount fixtures offers the latest in a new slimmer design, improved illumination, and a 5CCT switch providing for a choice between 2700K. 3000K, 3500K, 4000K & 5000K. Taking all the guesswork out of which color temperature should be ordered for either an upcoming application, or for inventory.
This easy-to-install design features a durable polystyrene lens and is a cost-effective solution to replace either older incandescent or CFL ceiling fixtures. Or for new construction projects.

The dual Brushed Nickel accents enhance any hallway, lobby, foyer, bedroom or bathroom, and meeting room in residential, commercial, healthcare and hospitality applications. The driver-on-board technology is also Triac Dimmable, for enhanced energy savings.

FEATURES

- LED Indoor Light Source.
- New Low profile Slim Design.
- Each fixture has a Dip Switch that provides for 2700K, 3000K, 3500K, 4000K, or 5000K
- Durable polystyrene lens is easily removed for both installation or maintenance.
- Brushed Nickel dual Spill Ring accents.
- DOB technology.
- Triac Dimmable.
- Suitable for damp locations
- 5 year warranty
- L70 - 50,000 hours
- Energy Star certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	POWER FACTOR	HARMONIC DISTORTION
SAMSUNG	90 CHIPS	25W - 2700K - 1751 LM / 3000K - 1876 LM / 3500K - 2076 LM 4000K - 2024 LM / 5000K - 2015 LM			70 LM /W	>80 CRI	>0.90	<40%

PRODUCT SPECIFICATIONS

BEAM ANGLE	VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120°	AC 120V	50-60HZ	STEEL/PS	>50,000 HOURS	-20°C~-45°C -4°F~-49°F	-20°C~-45°C -4°F~-49°F	16 x 2.3 INCHES (406 x 58.4 MM)	16.5 X 16.5 X 2.75 INCHES (420 X 420 X 70 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
FLUSH MOUNT - CEILING MOUNT	WHITE POLYSTYRENE	TRIAC DIMMABLE

ETLIN-DANIELS

CATALOG #		TYPE	
PROJECT		DATE	
PREPARED BY			

PRODUCT CODE: CM316SD-2515CD-BN | **5CCT LED FLUSHMOUNT/16 INCH ROUND SPILL RING/LOW PROFILE**

ENERGY STAR LISTING

ED Model Number	Technical Requirements Version	ENERGY STAR Unique ID	Listed Model Number	Category	Primary Use Designation
CM316SD-2515CD-BN	ES2.0	2402834	CM316SD-2515CD-BN	Indoor	Ceiling Mount

CERTIFICATIONS

Intertek · ENERGY STAR · CAL. T24 2005 · RoHS 2002/95/EC · 5 YEAR LIMITED WARRANTY

CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

DoB Driver on Board LED FLUSHMOUNT

DIMMABLE

ACCESSORIES



6" STEM KIT
PART# CMSTK6-BN

ORDERING INFORMATION - CM SERIES

SERIES	SIZE	LED TYPE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. CM3	16	SD	25	1	5C	D	BN
CM3 = CEILING MOUNT	16 = 16"	SD = SLIM	25 = 25W	1 = 120V	5C = 5CCT	D = TRIAC	BN =
		DRIVER ON BOARD			2700K/ 3000K/ 3500K/ 4000K/		BRUSHE NICKEL
					5000K		

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com