Technical Data Sheet


LINEAR FLUORESCENT

T5 High Output Programmed Rapid Start Lamps

Symban lighting

Technical/Electrical Data & Physical Characteristics

Item Number	Description	Wattage	Light Output		Life	Base	CRI	Colour Temperature	Nominal Length	Dimensions			Case Qty.
			Initial	Mean						A	B	D	
H24000-003	F24T5/830/HO/ECO	24W	2000lm	1900lm	24000 hrs	G5	82	3000K	22″	549mm	563mm	16mm	40
H24020-003	F24T5/835/HO/ECO	24W	2000lm	1900lm	24,000 hrs	G5	82	3500K	22″	549mm	563mm	16mm	40
H24040-003	F24T5/841/HO/ECO	24W	2000lm	1900lm	24,000 hrs	G5	82	4100K	22″	549mm	563mm	16mm	40
H24041-003	F24T5/841/HO/ECO SHATTER-PROOF	24W	2000lm	1900lm	24000 hrs	G5	82	4100K	22″	549mm	563mm	16mm	25
H39000-003	F39T5/830/HO/ECO	39W	3500lm	3300lm	24000 hrs	G5	82	3000K	34″	849mm	856mm	16mm	40
H39020-003	F39T5/835/HO/ECO	39W	3500lm	3300lm	24000 hrs	G5	82	3500K	34″	849mm	856mm	16mm	40
H39040-003	F39T5/841/HO/ECO	39W	3500lm	3300lm	24000 hrs	G5	82	4100K	34″	849mm	856mm	16mm	40
H49120-003	F49T5/835/HO/ ES/46″/ECO	49W	4500lm	4300lm	20000 hrs	G5	82	3500K	48″	1149mm	1156mm	16mm	40
H49140-003	F49T5/841/HO/ ES/46″/ECO	49W	4500lm	4300lm	20000 hrs	G5	82	4100K	48″	1149mm	1156mm	16mm	40
H49160-003	F49T5/850/HO/ ES/46″/ECO	49W	4500lm	4300lm	20000 hrs	G5	82	5000K	48″	1149mm	1156mm	16mm	40
H54000-003	F54T5/830/HO/ECO	54W	5400lm	4950lm	24000 hrs	G5	82	3000K	48″	1149mm	1156mm	16mm	40
H54020-003	F54T5/835/HO/ECO	54W	5400lm	4950lm	24000 hrs	G5	82	3500K	48″	1149mm	1156mm	16mm	40
H54040-003	F54T5/841/HO/ECO	54W	5400lm	4950lm	24000 hrs	G5	82	4100K	48″	1149mm	1156mm	16mm	40
H54041-003	F54T5/841/HO/ECO SHATTER-PROOF	54W	5400lm	4950lm	24000 hrs	G5	82	4100K	48″	1149mm	1156mm	16mm	40
H54060-003	F54T5/850/HO/ECO	54W	5400lm	4950lm	24000 hrs	G5	82	5000K	48″	1149mm	1156mm	16mm	40
H54061-003	F54T5/850/HO/ECO SHATTER-PROOF	54W	5400lm	4950lm	24000 hrs	G5	82	5000K	48″	1149mm	1156mm	16mm	40
H54070-003	F54T5/865/HO/ECO	54W	5400lm	4950lm	24000 hrs	G5	82	6500K	48″	1149mm	1156mm	16mm	40
H80100-003	F80T5/830/HO/ECO	80W	7000 lm	6650 lm	24000 hrs	G5	82	3000K	57″	1449mm	1456mm	16mm	40
H80110-003	F80T5/835/HO/ECO	80W	7000 lm	6650 lm	24000 hrs	G5	82	3500K	57″	1449mm	1456mm	16mm	40
H80120-003	F80T5/841/HO/ECO	80W	7000 lm	6650 lm	24000 hrs	G5	82	4100K	57″	1449mm	1456mm	16mm	40

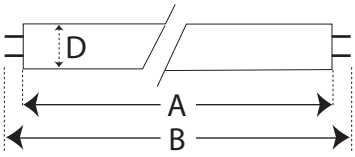

Symban Lighting Corp.
99 First Gulf Blvd. Brampton, ON
T. 905.450.5999 | F. 905.450.6665

All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.

Technical Data Sheet

LINEAR FLUORESCENT


T5 High Output Programmed Rapid Start Lamps

Symban lighting

Certifications

TCLP COMPLIANT

RoHS

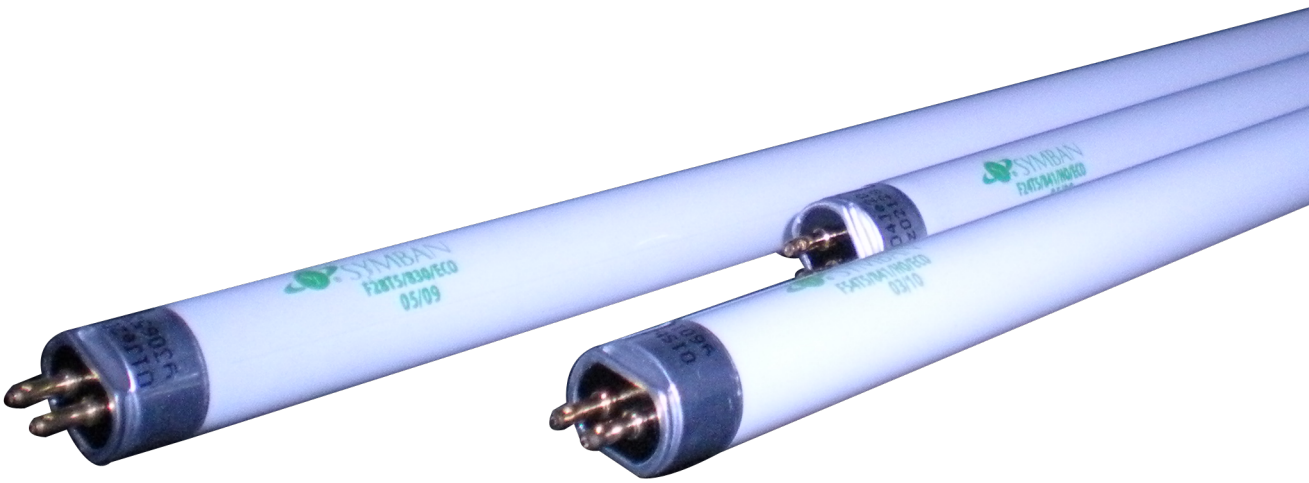

Symban Lighting Corp.
99 First Gulf Blvd. Brampton, ON
T. 905.450.5999 | F. 905.450.6665

All specifications are subject to change without notice. Actual performance may vary depending on operating conditions.