

ETLIN-DANIELS

PRODUCT CODE: WP5F-M60WCOP-CD

MULTI-WATTAGE & 3CCT LED FULL CUT-OFF WALL PACK



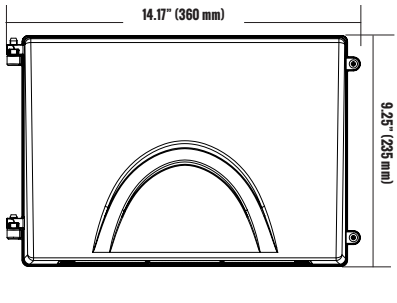



PRODUCT DESCRIPTION

Etlin-Daniels is pleased to introduce the WP5F-M Series of Full Cutoff Wall Packs. With its low-profile and stylish design, and durable powder coat finish, the WP5F-M is an easy-to-install and energy efficient solution to replace inefficient HID wall packs, or for new construction projects.

Available with Multi-Wattage and 3CCT Color Temperature switching, and in 120-347V, the WP5F-M series will reduce inventory strain. There is a built-in DC photocell which can be disabled, and the IP65 Wet Location rating will provide for secure fixture performance over its long life.

For additional energy savings, you can take advantage of the 0-10V Continuous Dimming. The WP5F-M Series is the perfect option for commercial, industrial, healthcare, residential, retail and hospitality facilities.

FEATURES

- Outdoor LED Light Source.
- Low profile, heavy duty die-cast aluminum body with durable powder coat finish
- Wattage selection switch - 36W / 48W / 60W
- 3CCT switch - 3000K / 4000K / 5000K
- 4KV Surge Protection
- Built-in photocell - can be disabled
- 120-347V
- Easy to install / contractor friendly
- IP65 Wet Location Rated
- 0-10V Continuous Dimming
- 5 year warranty
- L70 - 50,000 hours
- IK08 Rated
- DLC 5.1 Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILED	196 CHIPS	36W - 3000K - 5155 LM / 4000K - 5515 LM / 5000K - 5498 LM 48W - 3000K - 6568 LM / 4000K - 7096 LM / 5000K - 6995 LM 60W - 3000K - 7832 LM / 4000K - 8537 LM / 5000K - 8462 LM			130 - 153 LM /W	>80 CRI	>86%	>0.90	<20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120~347V	50-60HZ	ALUMINUM / BOROSILICATE PC LENS	IP65	>50,000 HOURS	-40°C~+80°C -40°F~+176°F	-40°C~+45°C -40°F~+113°F	14.17 X 9.25 X 6.02 INCHES (360 X 235 X 153 MM)	15.75 X 11.81 X 8.66 INCHES (400 X 300 X 220 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
WALL MOUNT	DARK BRONZE	PHOTOCELL 0-10V CONTINUOUS DIMMING

ETLIN-DANIELS

PRODUCT CODE: WP5F-M60WC0P-CD | **MULTI-WATTAGE & 3CCT LED FULL CUT-OFF WALL PACK**

DLC LISTING

ED Model Number	Technical Requirements Version	Product ID	Listed Model Number	Category	Primary Use Designation
WP5F-M60WC0P-CD	DLC 5.1 Premium	S-2XK0CJ	WP5F-M60WC0P-CD	Outdoor Luminaires	Outdoor Full-Cutoff Wall-Mounted Area Luminaires

CERTIFICATIONS



CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

ORDERING INFORMATION - WP5M SERIES

SERIES	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	PHOTOCELL	LENS	FINISH
E.G. WP5F	M60	W	C	0	P	C	D
WP5F - WALL PACK	M60 =	W = 120 - 347V	C = CHANGEABLE COLOR TEMP.	0 = 0 - 10V	P = PHOTOCELL	C - CLEAR	D - DARK BRONZE
FULL CUT-OFF	MULTI WATTAGE		- 3000K / 4000K / 5000K	CONTINUOUS	INSTALLED		
	36W/48W/60W			DIMMING			
	60W MAX						

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com